

1 2 3 4 5 6



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2020.07.24.

A


B

C

D

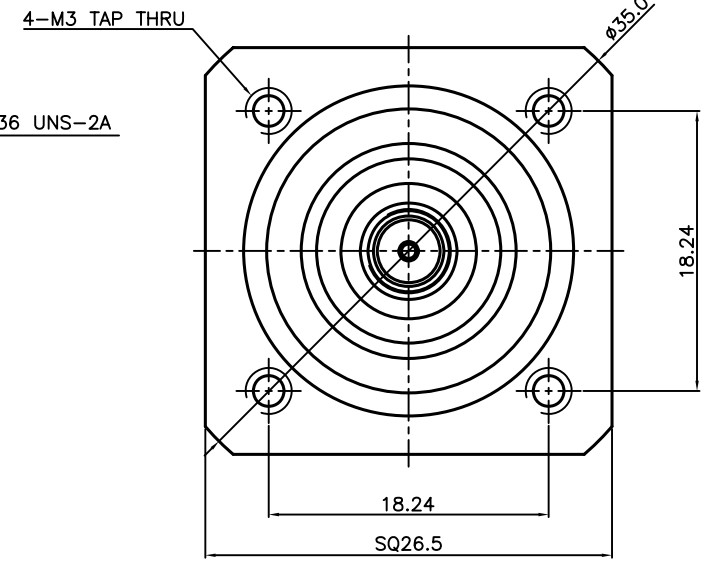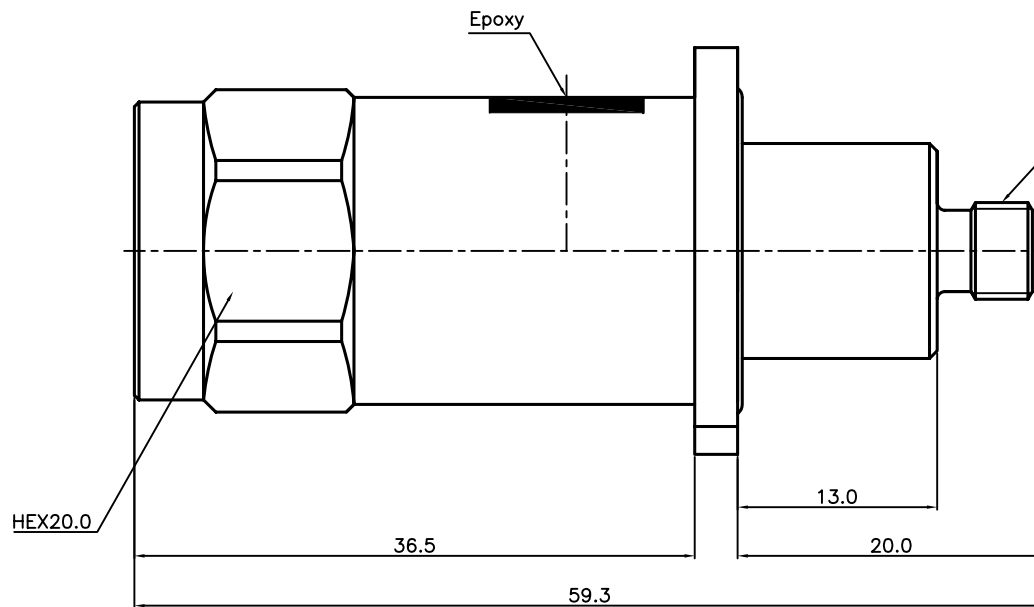

* ELECTRICAL SPECIFICATIONS
Frequency Range : 5.8GHz~5.92GHz
Insertion Loss (Min.) : -0.5dB
V.S.W.R (Max.) : 1.25
Impedance : 50Ω
방수 : IP67
Impulse Discharge Voltage : 6kV(1.2/50μs) / 3kA (8/20μs)

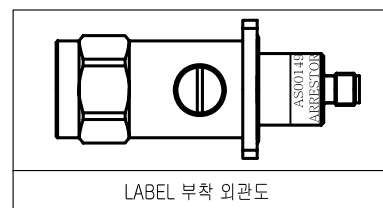

13	EPOXY (경화제519)	1	—	—	CAD00021-N/2 (경화제_519)
12	EPOXY (주제519)	1	—	—	CAD00021-N/1(주제_519)
11	LABEL	1	은무대드롬	—	DLA00811-8/1
10	GAS TUBE	1	—	—	DGT00010-N/1
9	COVER	1	MSsBD C3604BD-F	Nickel Plate	DCS00063-5/1
8	INSULATOR	2	TEFLON		DIN03160-N/1
7	INSULATOR	1	TEFLON		DIN03159-N/1
6	GASKET	1	SILICONE RUB	RED	DGK00013-N/1
5	GASKET	1	SILICONE RUB	RED	DGK00050-N/1
4	CONTACT (B)	1	BeCu C17300	Gold Plate	DCT04142-5/1
3	CONTACT (A)	1	MSsBD C3604BD-F	Gold Plate	DCT04141-5/1
2	BODY(B)	1	MSsBD C3604BD-F	Nickel Plate	DBD04638-5/1
1	BODY(A)	1	MSsBD C3604BD-F	Nickel Plate	DBD04637-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 07. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	TITLE	NP SMAJ (Gas) ARRESTOR 5800~5920 MHz		
	Angle	APPROVED BY						
MATERIAL	±1°	CHECKED BY		DWG NO.	AS00150-7/1			
		DRAWN BY	I.C.KIM					
FINISH		SCALE	UNIT	A3	REVISION	I R	SHEET	1 of 1
		3/1	mm					

1 2 3 4 5 6