



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	S.J.YOUN	2009. 06. 08.
1	[설번처리No.201201-0008] 특성개선 PCB 뒀면 수정	I.C.KIM	J.H.YOUN	2012. 01. 18.

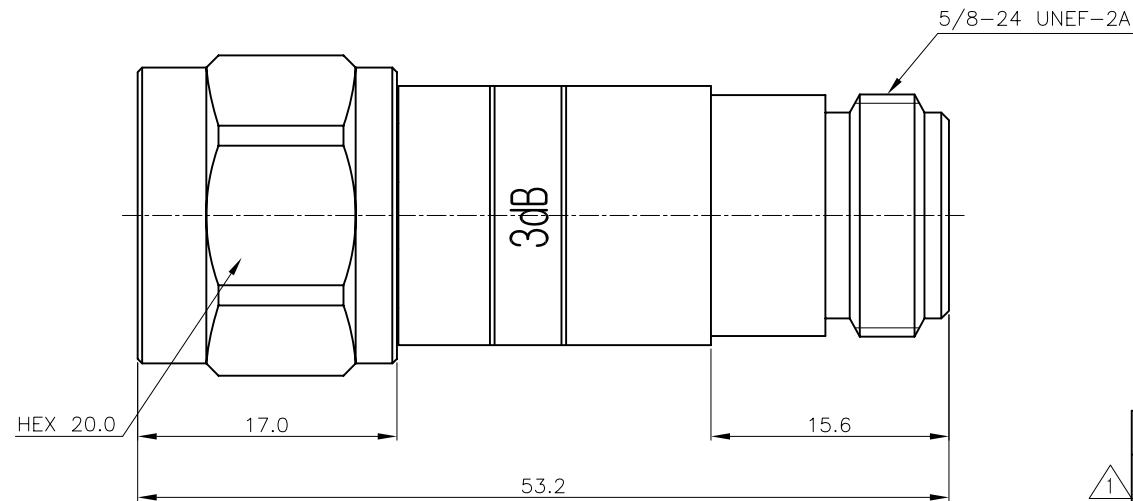

- * ELECTRICAL SPECIFICATIONS
1. Frequency Range : DC ~ 3GHz
 2. Insertion Loss (Max.) : 3dB $\pm$ 0.5dB
 3. V.S.W.R (Max.) : 1.2 : 1
 4. Impedance : 50 Ω
 5. Power Rating : 3Watt

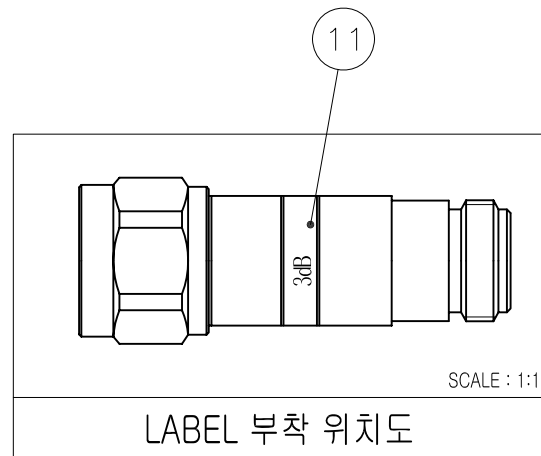

11	LABEL	1	은색라벨지		DLA00236-8/1
10	PCB	1	FR4		DPC00416-9/2 DPC00416-9/1
9	RESISTOR	1			
8	SPRING RING	1	MBsBD	Nickel Plate	DSR00020-5/1
7	CAP	1	MBsBD	Nickel Plate	DCU00063-5/3
6	INSULATOR	2	TEFLON		DIN00699-N/1
5	GASKET	1	SILICONE RUB		DGK00013-N/1
4	CONTACT(B)	1	BeCu	Gold Plate	DCT01745-5/1
3	CONTACT(A)	1	MBsBD	Gold Plate	DCT01744-5/1
2	BODY(B)	1	MBsBD	Nickel Plate	DBD02311-5/1
1	BODY(A)	1	MBsBD	Nickel Plate	DBD02220-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2012. 01. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE N50-A-JP ATTENUATOR
		DRAWN BY	I.C.KIM	
FINISH		SCALE	2/1	A4 DWG NO. AT00007-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	