
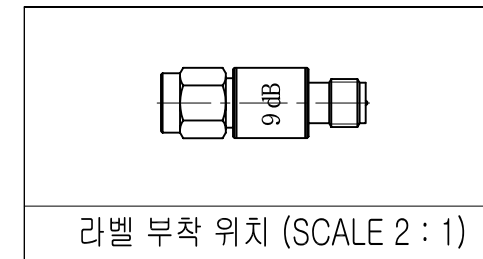


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	I.C.KIM	I.C.KIM	2013.11.15.

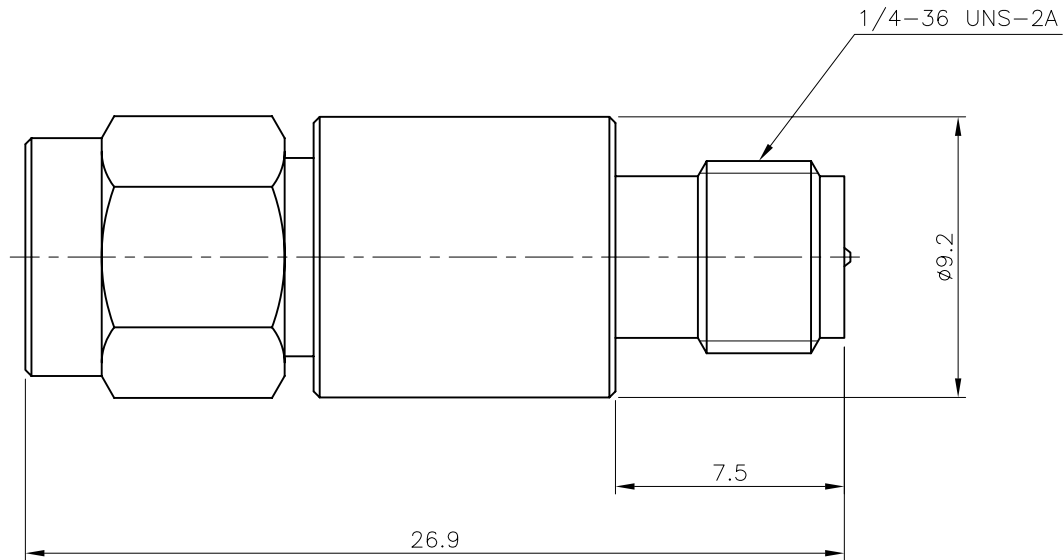

★ ELECTRICAL SPECIFICATIONS

1. Frequency Range : DC ~ 6GHz
2. Impedance : 50Ω
3. V.S.W.R (Max.) : 1.2 : 1
4. ATTENUATION : 9dB±0.6dB
5. POWER : 2W

MECHANICAL SPECIFICATIONS

Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Brass Nickel Plated
Temp Range	- 55°C ~ + 125°C

10	LABEL	1	은색데드롱		DLA00520-8/1
9	GASKET	1	SILICONE RUB		DGK00004-N/1 (G2001)
8	SPRING RING	1	SUS	Passivated	DSR00002-5/1 (R2001)
7	CAP	1	MBsBD	Nickel Plate	DCU00005-5/2 (K2011)
6	PCB ASS'Y	1	2.5 31mil 10Z		DPA00019-S/1
5	INSULATOR	2	TEFLON		DIN01674-N/1
4	CONTACT(B)	1	BeCu	Gold Plate	DCT02090-5/1
3	CONTACT(A)	1	MBsBD	Gold Plate	DCT02089-5/1
2	BODY(B)	1	MBsBD	Nickel Plate	DBD02585-5/1
1	BODY(A)	1	MBsBD	Nickel Plate	DBD02584-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 11. 15.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY	I.C.KIM					
	$\pm 1^{\circ}$	CHECKED BY	E.H.KIM					
MATERIAL	_____	DRAWN BY	I.C.KIM					
FINISH	_____	SCALE 4/1	UNIT mm		A4	DWG NO. AT00093-7/1	SHEET 1 of 1	
						REVISION I R		



TITLE RP-SMA (reverse polarity) male and female
ATTENUATOR 9dB