
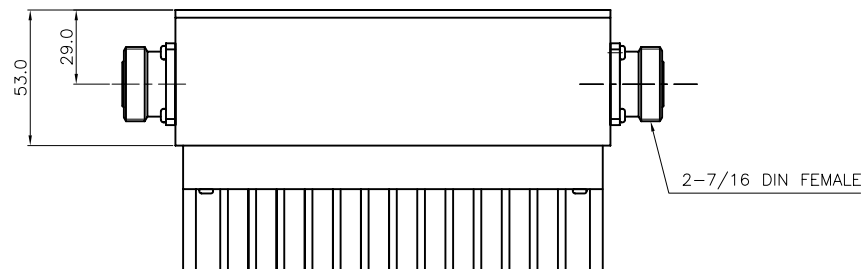
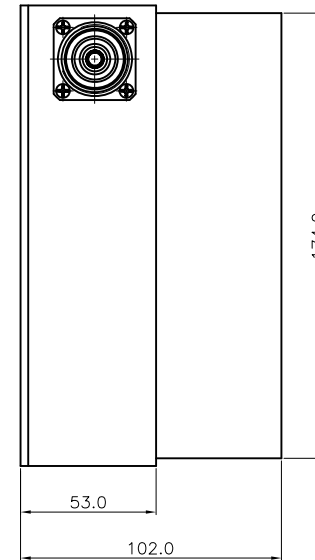


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.01.28.

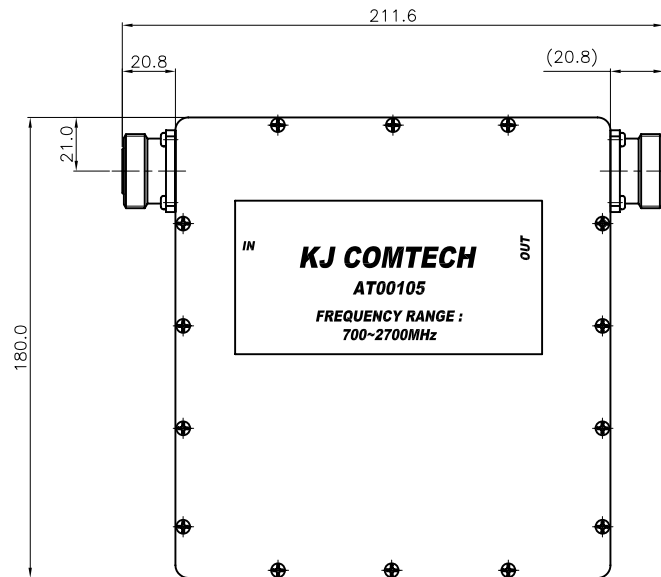

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 698~2700MHz
 Impedance : 50.0Ω
 Attenuation Value : 10.0 ± 1.0dB
 V.S.W.R(Max.) : 1.25:1
 PIMD : -160dBc @ 20W 2tone
 RF Power : 100 W Avg.

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061
 CONNECTORS PINS : Beryllium Copper
 CONNECTORS BODY : MBsBD
 INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2015. 01. 28.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	TITLE PIMD POWER ATTENUATOR
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL A6061	FINISH White Chromate	CHECKED BY T.J.KIM	DWG NO. AT00105-7/1 REVISION 1 SHEET 1 of 1	SCALE 1/1 UNIT mm
		DRAWN BY S.L.SON		