
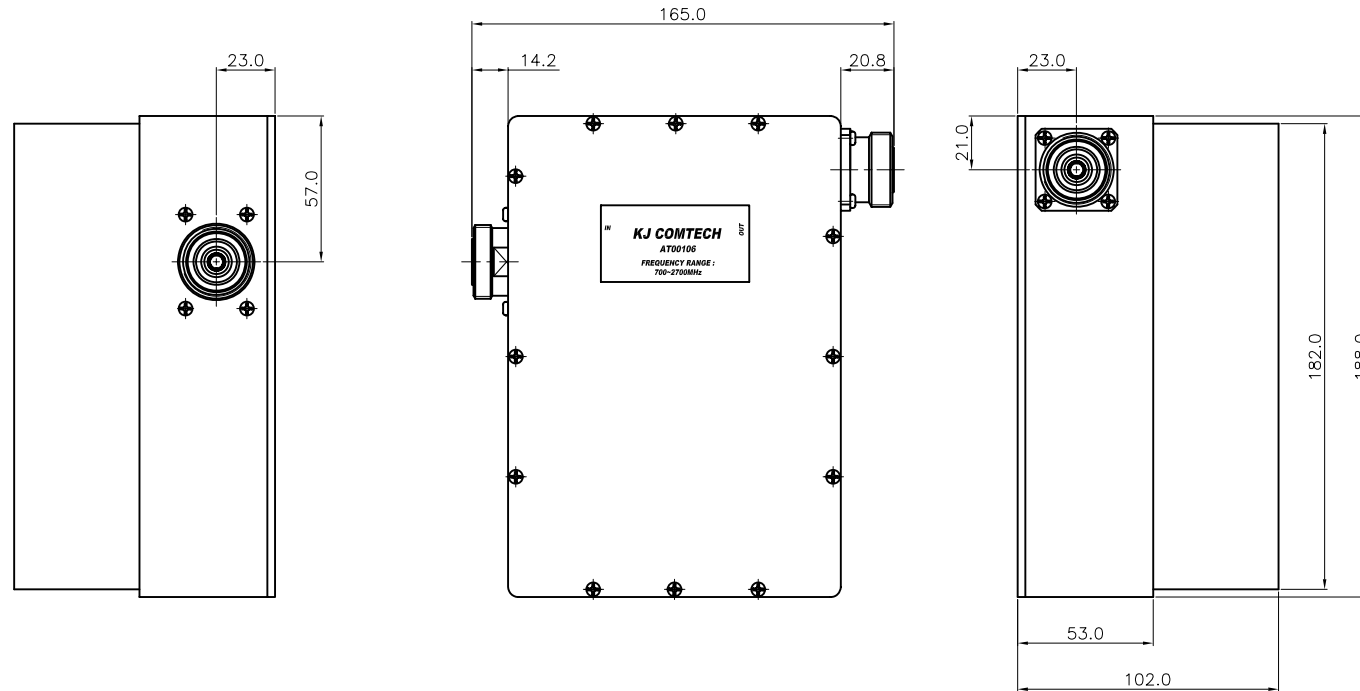


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.01.28.

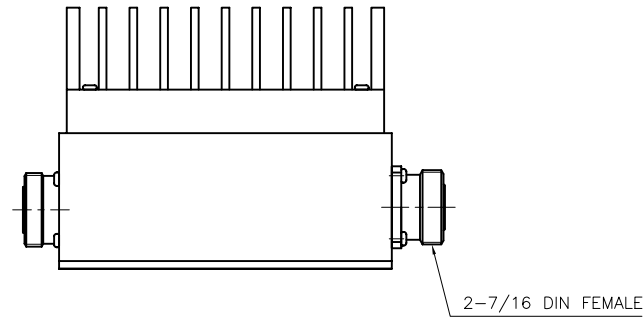

* ELECTRICAL SPECIFICATIONS

Frequency Range : 698~2700MHz
 Impedance : 50.0Ω
 Attenuation Value : 10.0 ± 1.0dB
 V.S.W.R(Max.) : 1.4:1 (IN PORT)
 PIMD : -160dBc @ 20W 2tone
 RF Power : 100 W Avg.

* MECHANICAL SPECIFICATIONS

HOUSING : A6061
 CONNECTORS PINS : Beryllium Copper
 CONNECTORS BODY : MBsBD
 INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2015. 01. 28.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY J.H.YOUN			
MATERIAL A6061	FINISH White Chromate	CHECKED BY T.J.KIM	TITLE PIMD POWER ATTENUATOR		
		DRAWN BY S.L.SON			
SCALE 1/1		UNIT mm	A3	DWG NO. AT00106-7/1	
				REVISION 1	SHEET 1 of 1