


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2014.12.29.
2	Connector 식재, 리플 부착 부분 변경	T.J.KIM	J.H.YOUN	2015.07.09.
3	4.1/9.5 Mini Din -> 4.3/10 Mini Din으로 변경	T.J.KIM	J.H.YOUN	2016.03.25.

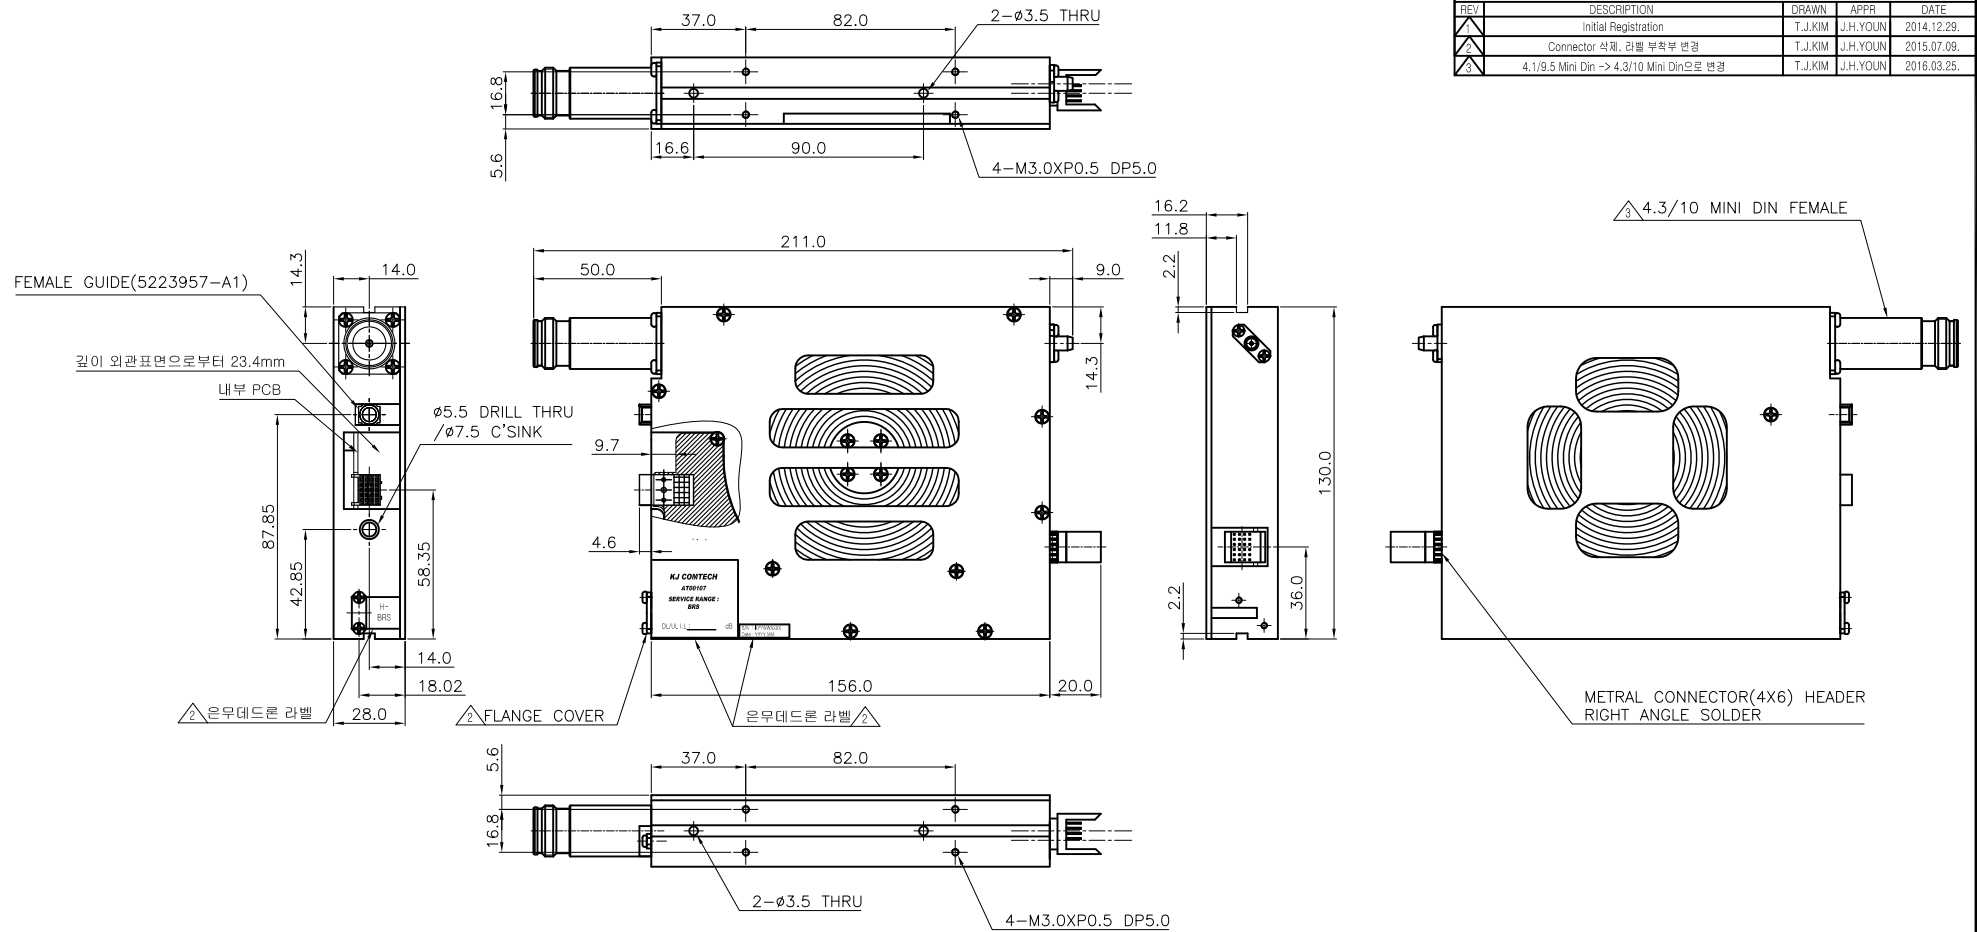


* ELECTRICAL SPECIFICATIONS

Service Band : BRS
Frequency range : DL - 2496 ~ 2690MHz
UL - 2496 ~ 2690MHz

Input V.S.W.R (Max.) : 1.4 : 1
PIM (Max.) : -156dBc (@43.0dBm 2Tone, WiBro)
Attenuation Value : -23.0 ± 1.0dB(DL, UL)
Flatness (Max.) : 2.0dB(DL)
Input Power (Max.) : 40W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTOR(4.3/10) : MBsBD (SUCO Plate)
CONNECTOR PIN(4.3/10) : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON



S/N : KYYWWXXX
Date : YYYY.MM

* 삽입손실 표기 내용

A : 2593 MHz Insertion Loss
해당 주파수의 값을 수기로 표기 (ex : -23.3)

* Serial label 표기 내용

S/N : KYYWWXXXX (YY : YEAR, WW: WEEK, XXXX : NUMBER)
Date : YYYY.MM (Date of manufacture)

TOLERANCE		Decimal ±0.3	DATE	2016. 03. 25.	 R# & MICROFICHE TECHNICAL COPY Tel : 82-52-347-8015 Fax : 52-52-347-8937	
Angle		APPROVED BY	J.H.YOUN		TITLE PIMD ATTENUATOR DWG NO. AT00107-7/3 REVISION 3 SHEET 1 of 1	
±1°		CHECKED BY	S.L.SON			
MATERIAL		DRAWN BY		T.J.KIM		A1
A6061 T6		CREATED BY		T.J.KIM		
FINISH		SCALE	1/1	UNIT	mm	
White Chromate						