
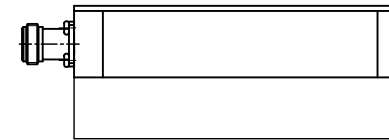
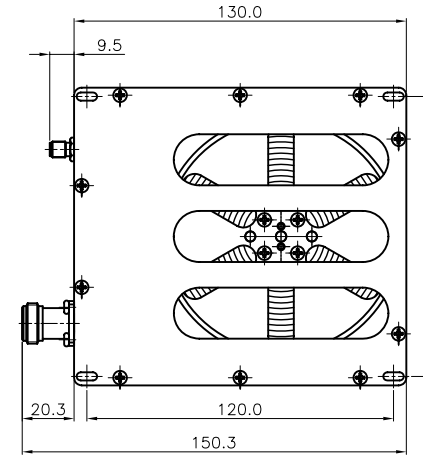


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△	Initial Registration	T.J.KIM	J.H.YOUN	2016.01.22.

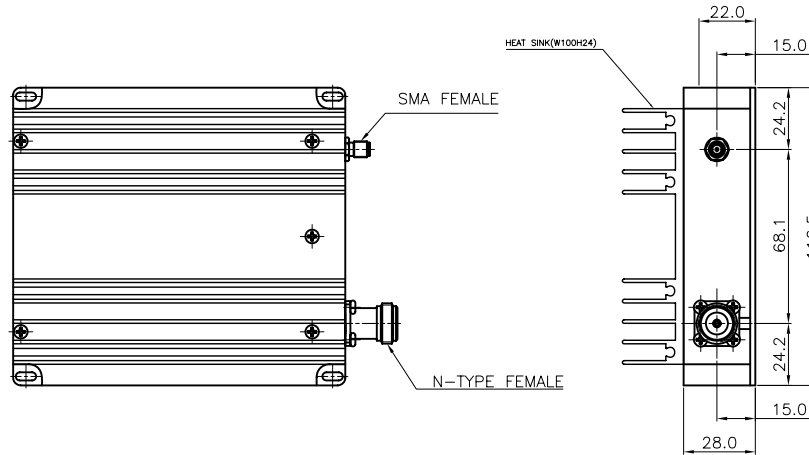

* ELECTRICAL SPECIFICATIONS

Frequency range : 1920~1980MHz(RX->ANT)

,2110~2170MHz(ANT->TX)

Input V.S.W.R (Max.) : 1.4 : 1

PIM (Max.) : -150dBc (@43.0dBm 2Tone, WCDMA)

Attenuation Value : 30dB

Flatness (Max.) : 2dB

Input Power (Max.) : 50W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE	2016. 01. 22.	 RF & MICROWAVE TECHNOLOGY KJ COMTECH CO., LTD. Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY	J.H.YOUN				
MATERIAL	±1°	CHECKED BY	S.L.SON	TITLE			
	A6061 T6	DRAWN BY	T.J.KIM				
FINISH	White Chromate	SCALE	1/1	A1	PIMD ATTENUATOR	DWG NO.	AT00109-7/1
		UNIT	mm			REVISION	1