

DC~3GHz 10Watts

REVISION


REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	S.L.SON	J.H.YOUN	2017.02.23.

MECHANICAL SPECIFICATIONS

Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	A6061 Anodizing
Temp Range	- 55℃ ~ + 125℃
Dimensions	Ø30 x 60.4mm
Weight	

ELECTRICAL SPECIFICATIONS

Frequency Range : DC ~ 3GHz			Impedance : 50 Ω		Power : 50 Watts	
KJ CODE	Attenuation Value & Accuracy (dB)	V.S.W.R (max)	KJ CODE	Attenuation Value & Accuracy (dB)	V.S.W.R (max)	
	3 ±0.5	1.20 : 1				
	5 ±0.5	1.20 : 1				
	10 ±1.0	1.20 : 1				
	15 ±1.0	1.20 : 1				
	20 ±1.0	1.20 : 1				
	25 ±1.0	1.20 : 1				
	30 ±2.0	1.20 : 1				
	40 ±2.0	1.25 : 1				

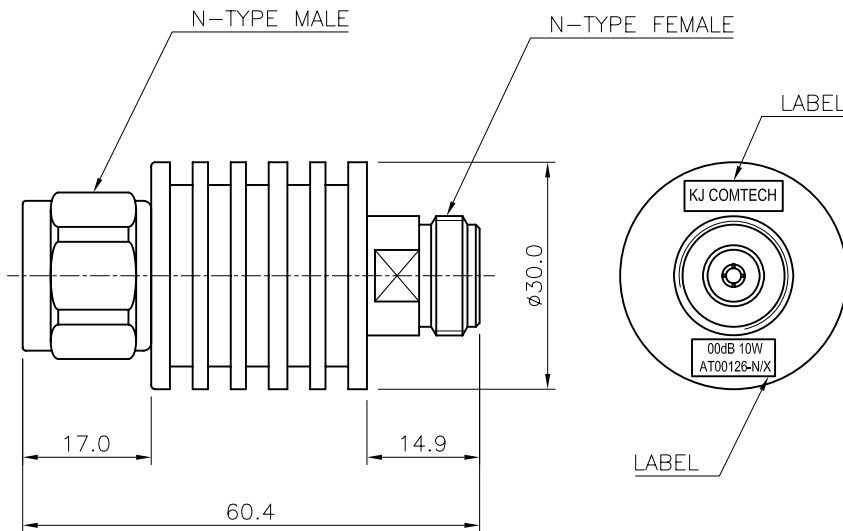

TOLERANCE	Decimal ±0.2	DATE 2017. 02. 23.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY	J.H.YOUN				
MATERIAL -		CHECKED BY	T.J.KIM		TITLE DC~3GHz 10Watts N50 (J)-N50 (P) ATTENUATORS		
		DRAWN BY	S.L.SON				
FINISH -		SCALE 1/1	UNIT mm		A4	DWG NO. AT00126-N/1	SHEET 1 of 1
						REVISION 1	