


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2017.03.29.

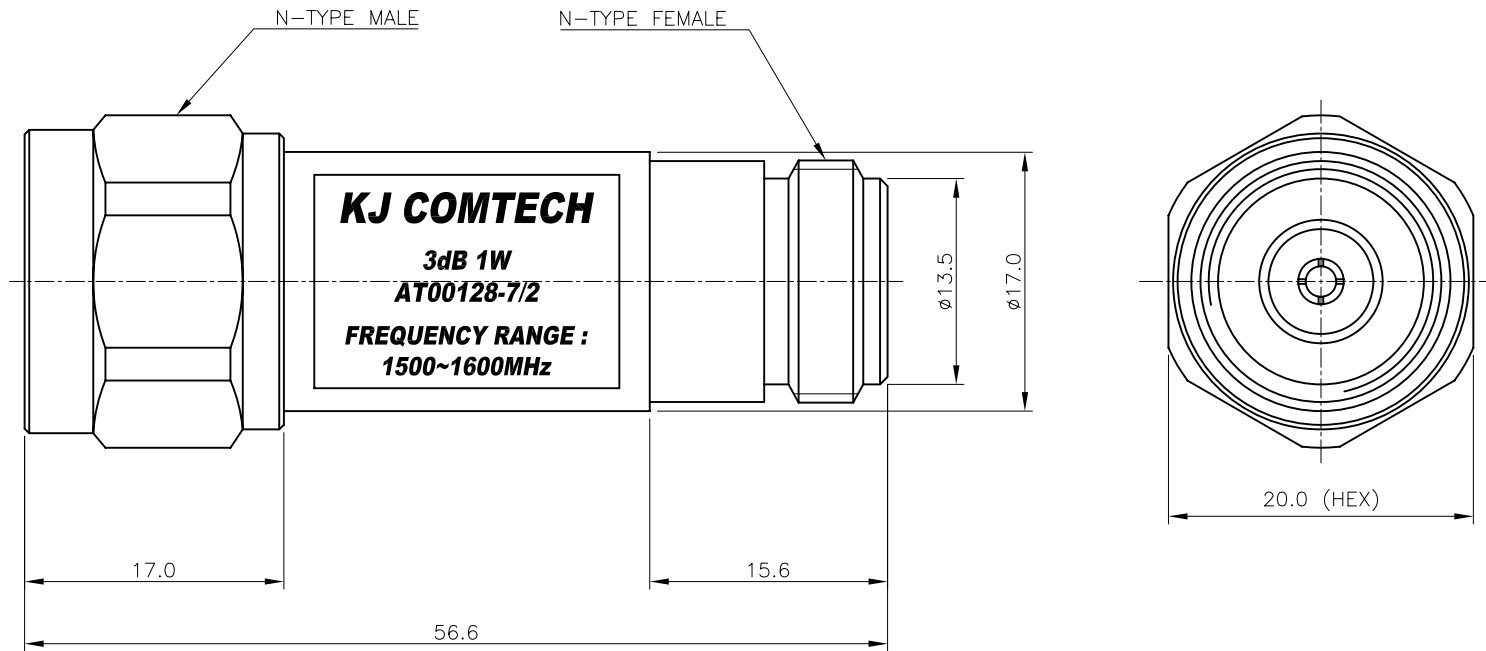

Mechanical Specification

Connector	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	MBsBD Nickel Plated

Electrical Specifications

Frequency	1500~1600MHz
VSWR	1.2:1
Impedance	50Ω
Power	1W
DC Pass	5Vdc
Current (MAX.)	1A
Attenuation Value dB(KJ Code)	3±0.5dB (AT00128-7/2)
	6±0.5dB (AT00128-7/3)
	10±0.5dB (AT00128-7/4)
	15±0.5dB (AT00128-7/5)
	20±0.5dB (AT00128-7/6)

TOLERANCE	Decimal ±0.3	DATE 2017. 03. 29.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	*****	CHECKED BY	T.J.KIM	KJ COMTECH CO.,LTD. TITLE 1500~1600MHz 1Watts N50 (J)-N50 (P) ATTENUATORS
		DRAWN BY	S.L.SON	
FINISH	*****	SCALE	2/1	DWG NO. AT00128-7/2 REVISION 2 SHEET 1 of 1
		UNIT	mm	

A4