


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017.11.08.

1.SPECIFICATIONS

1	FREQ.	DC~3 GHz	
2	VSWR	1.3 MAX.	
3	POWER	10Watt	
4	ATTENUATION	3dB: ± 1.0dB	AT00135-N/1
		6dB: ± 1.0dB	AT00135-N/2
		10dB: ± 1.0dB	AT00135-N/3
		20dB: ± 1.0dB	AT00135-N/4
5	IMPEDANCE	50Ω nominal	

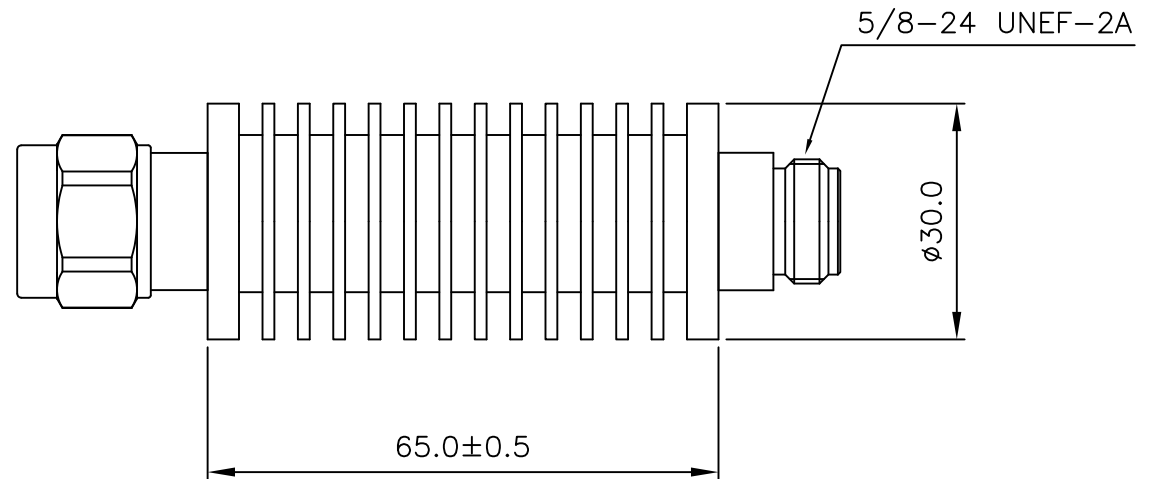

2. MECHANICAL SPECIFICATIONS

NO	PART NAME	SPECIFICATION	Q'TY	REMARKS
1	HOUSING	Brass(C3604 BD) , Ni PLATING	1	
2	INSULATOR	TEFLON(PTFE)	1	
3	GASKET	SILICONE RUBBER	1	
4	INNER CONTACT(M)	Brass(C3604 BD), Au PLATING	1	
5	INNER CONTACT(F)	BeCu(C1730 B) , Au PLATING	1	
6	HOUSING	Aluminum , White Chromate	1	
7	HEAT SINK	Aluminum , Black Anodizing	1	

TOLERANCE	Decimal ±0.1	DATE 2017. 11. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE ATTENUATOR N TYPE PLUG to JACK
FINISH		DRAWN BY	S.Y.EUN	
		SCALE 1/1	UNIT mm	DWG NO. AT00135 REVISION I R SHEET 1 of 1



A4