

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.Y.EUN	I.C.KIM	2017.11.08.

1. SPECIFICATIONS




1	FREQ.	DC~3 GHz	
2	VSWR	1.3 MAX.	
3	POWER	20Watt	
4	ATTENUATION	3dB: ± 0.5 dB	AT00136-N/1
		6dB: ± 0.6 dB	AT00136-N/2
5	IMPEDANCE	50 Ω nominal	

2. SPECIFICATIONS

1	FREQ.	DC~4 GHz	
2	VSWR	1.3 MAX.	
3	POWER	20Watt	
4	ATTENUATION	10dB: ± 1.2 dB	AT00136-N/3
		20dB: ± 1.2 dB	AT00136-N/4
5	IMPEDANCE	50 Ω nominal	

3. MECHANICAL SPECIFICATIONS

NO	PART NAME	SPECIFICATION	REMARKS
1	HOSUSING	ALUMINUM , WHITE CROMATED	
2	CONNECTOR	Brass , Ni and 3Mat'l PLATING	
3	CENTER CONTACT	Brass , Au PLATING	
4	INSULATOR	TEFLON(PTFE)	

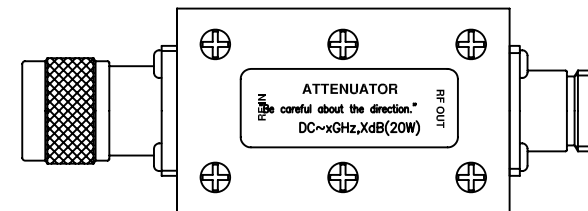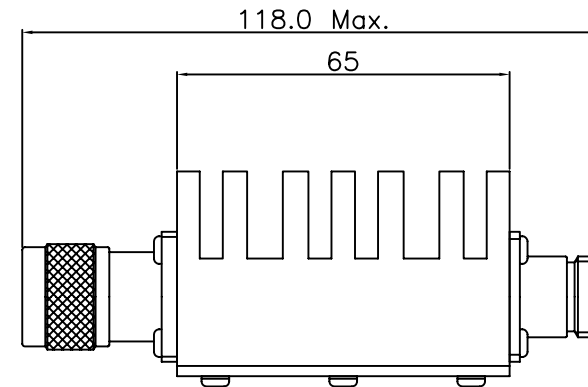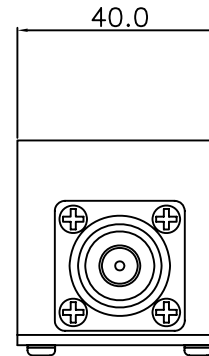

TOLERANCE	Decimal ± 0.1	DATE 2017. 11. 08.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	TITLE ATTENUATOR N TYPE PLUG to JACK
	Angle $\pm 1^\circ$	APPROVED BY I.C.KIM		
MATERIAL	—	CHECKED BY	 KJ COMTECH CO., LTD.	DWG NO. AT00136
		DRAWN BY S.Y.EUN		
FINISH	—	SCALE 1/1	UNIT mm	REVISION I R
				SHEET 1 of 1