
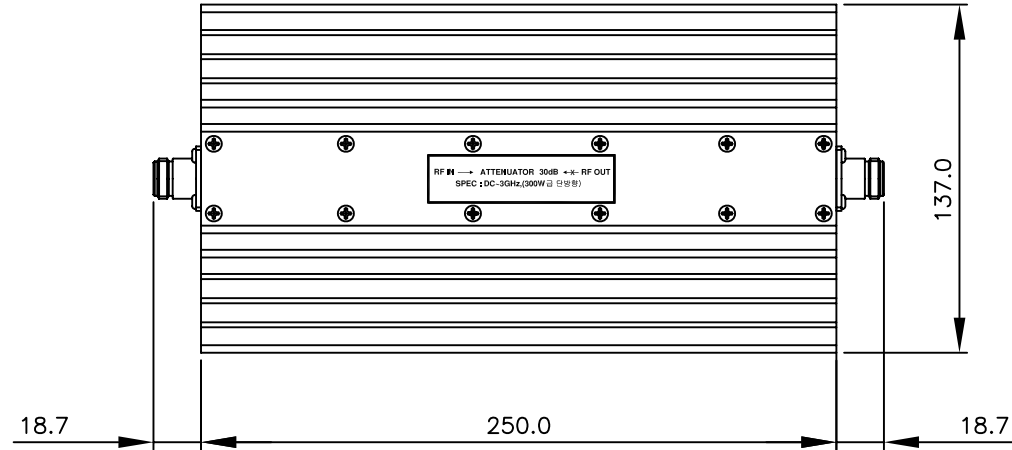


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.04.16.

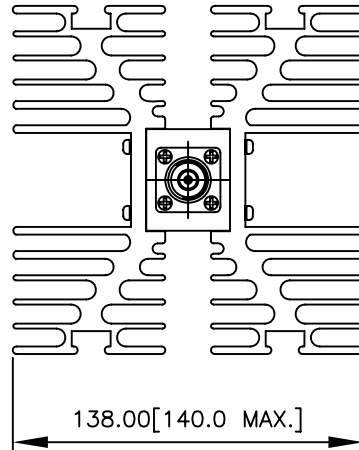

1. ELECTRICAL SPECIFICATIONS

1	FREQUENCY RANGE	DC to 3000MHz
2	POWER RATING(AVG.)	300W
3	ATTENUATION	30dB±1.5dB
4	VSWR	1.2 MAX.(INPUT) 1.35 MAX.(OUTPUT)
5	Impedance (Nominal)	50Ωhm

2. MECHANICAL SPECIFICATIONS

NO	PART NAME	SPECIFICATION	REMARKS
1	HOUSING	ALUMINUM , CROMATE	
2	HEAT SINKS	ALUMINUM , BLACK ANODIZING	
3	CONNECTOR	B5(C3604 BD) , 3MAT'L or Ni PLATING	
4	CENTER CONTACT	B5(C3604 BD) , Au PLATING	
5	INSULATOR	TEFLON(PTFE)	

TOLERANCE	Decimal ±0.2	DATE 2018. 04. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	I.C.KIM		
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE N50(J) - N50(J) ATTENUATOR 30dB, 250W	
		DRAWN BY	S.Y.EUN		
FINISH		SCALE	1/3	UNIT	mm
				 A4	DWG NO. AT00143-7/1 REVISION I R SHEET 1 of 1