


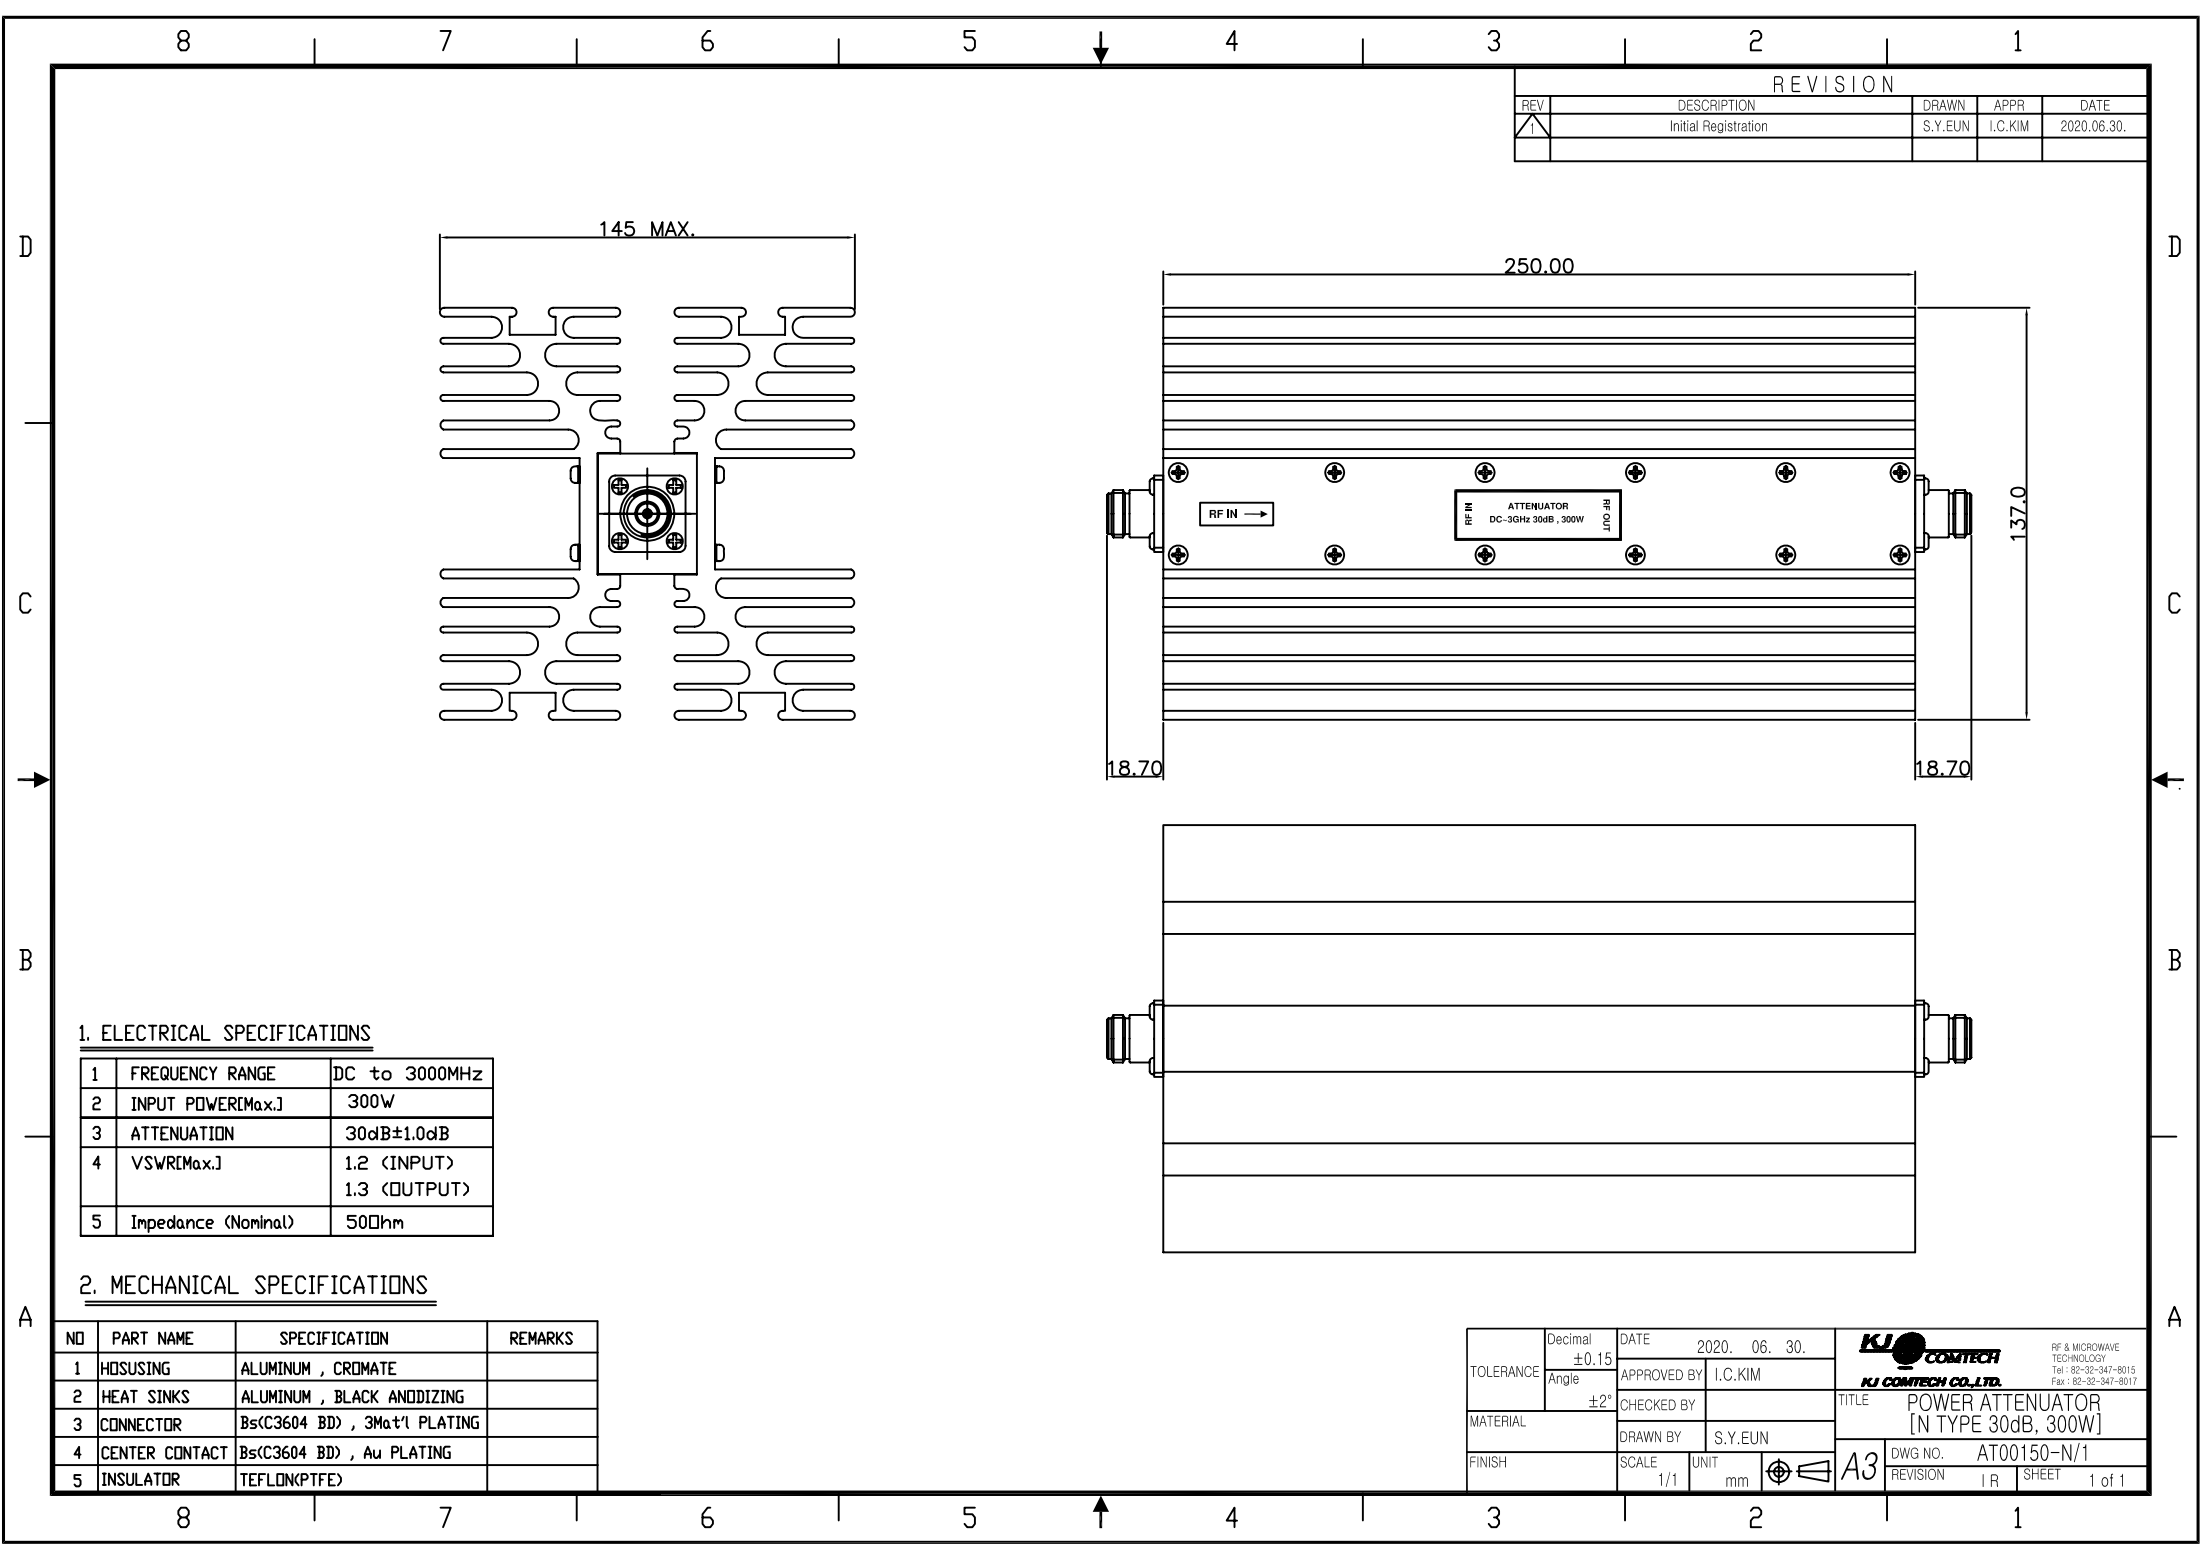

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.Y.EUN	I.C.KIM	2020.06.30.

1. ELECTRICAL SPECIFICATIONS

1	FREQUENCY RANGE	DC to 3000MHz
2	INPUT POWER[Max.]	300W
3	ATTENUATION	30dB±1.0dB
4	VSWR[Max.]	1.2 (INPUT) 1.3 (OUTPUT)
5	Impedance (Nominal)	50Ωhm

2. MECHANICAL SPECIFICATIONS

NO	PART NAME	SPECIFICATION	REMARKS
1	HDSUSING	ALUMINUM , CROMATE	
2	HEAT SINKS	ALUMINUM , BLACK ANODIZING	
3	CONNECTOR	Bs(C3604 BD) , 3Mat'l PLATING	
4	CENTER CONTACT	Bs(C3604 BD) , Au PLATING	
5	INSULATOR	TEFLON(PTFE)	

TOLERANCE	Decimal ±0.15	DATE 2020. 06. 30.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle ±2°	APPROVED BY I.C.KIM				
MATERIAL		CHECKED BY	TITLE POWER ATTENUATOR [N TYPE 30dB, 300W]			
		DRAWN BY S.Y.EUN				
FINISH		SCALE 1/1	UNIT mm		A3	DWG NO. AT00150-N/1
		REVISION				I R