


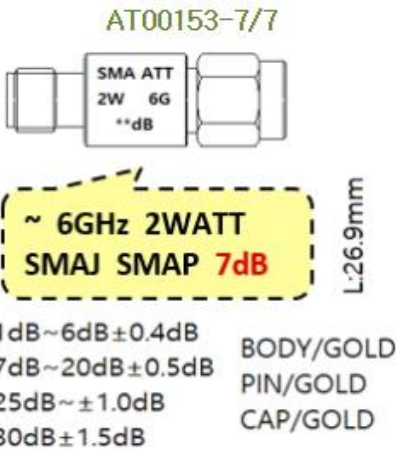

AT00153-7/7	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor

- ☒ E5071B (~8.5GHz)
- ☒ N Male to SMA Male
- ☐ ZVA50 (~50GHz)
- 10GHz Cable (CF00540-7/1)
- ☐ ZND (~8.5GHz)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

