



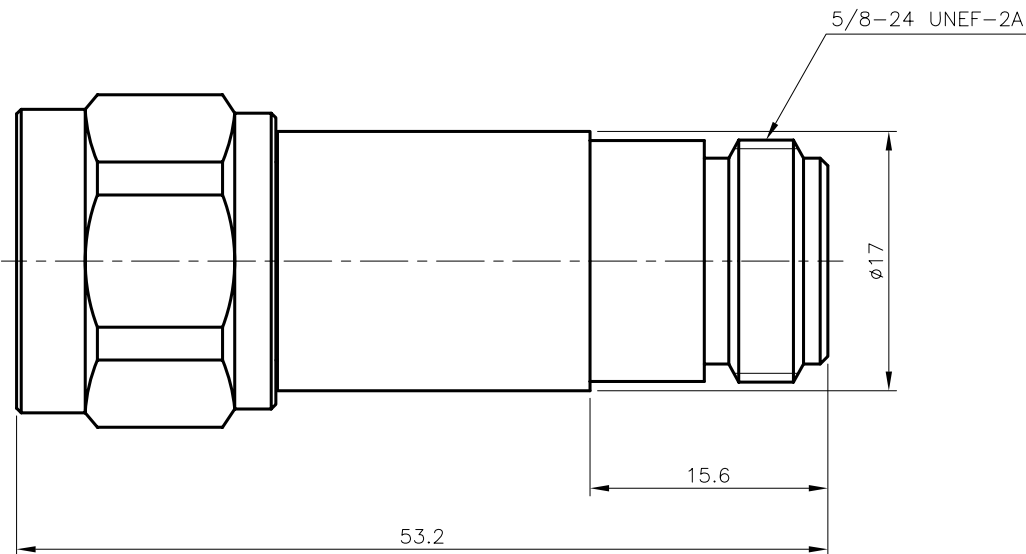


■ PCB 저항 납땜 위치 및 주의사항은
DPA01097-S/C도면 참조할 것

- * ELECTRICAL SPECIFICATIONS
1. Frequency Range : DC ~ 6GHz
 2. Impedance : 50Ω
 3. V.S.W.R (Max.) : 1.25 : 1
 4. ATTENUATION : $20\text{dB} \pm 0.5\text{dB}$
 5. POWER : 2W

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021. 07. 26.



제품 레이저 각인 내용



Attenuation — Frequency Max.

레이저 각인 폰트 관련 설정

FONT : Arial
STYLE : Regular
HEIGHT : 6mm

9	GASKET	1	SILICONE RUB		DGK00013-N/1
8	SPRING RING	1	MBsBD C3604BD-F	Nickel Plate	DSR00020-5/1
7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
6	PCB ASS'Y	1	FR4		DPA01097-S/C
5	INSULATOR	2	TEFLON		DIN00699-N/1
4	CONTACT(B)	1	BeCu C17300	Gold Plate	DCT01745-5/1
3	CONTACT(A)	1	MBsBD C3604BD-F	Gold Plate	DCT01744-5/1
2	BODY(B)	1	MBsBD C3604BD-F	Nickel Plate	DBD02311-5/1
1	BODY(A)	1	MBsBD C3604BD-F	Nickel Plate	DBD02220-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 07. 26.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE N50-A-JP ATTENUATOR (20dB)
		DRAWN BY	I.C.KIM	
FINISH		SCALE	2/1	DWG NO. AT00158-7/C REVISION I R SHEET 1 of 1
		UNIT	mm	



A4