
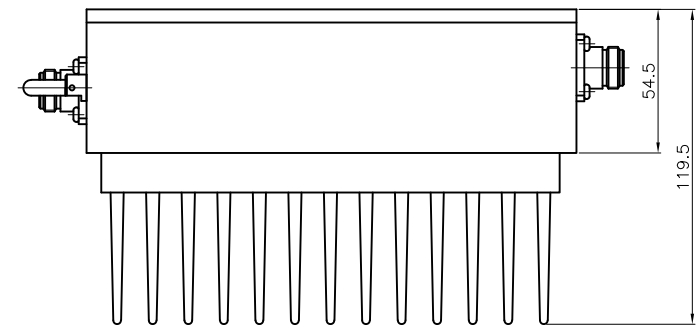
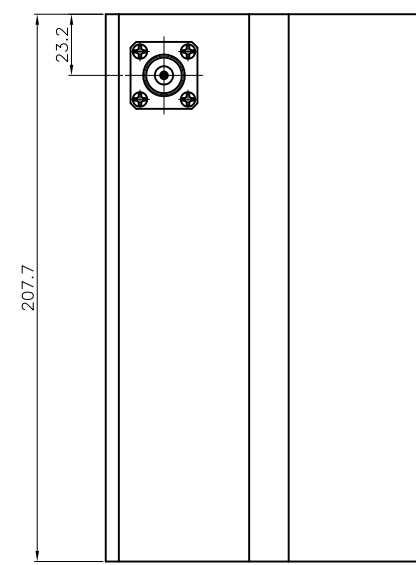
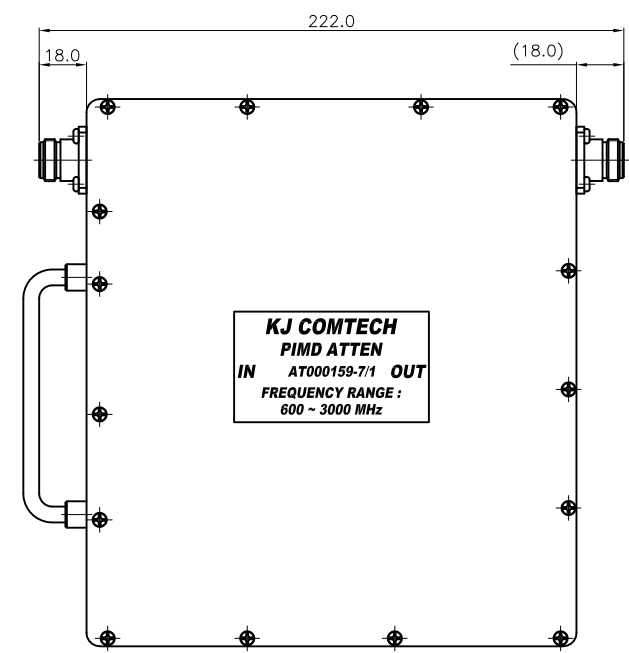
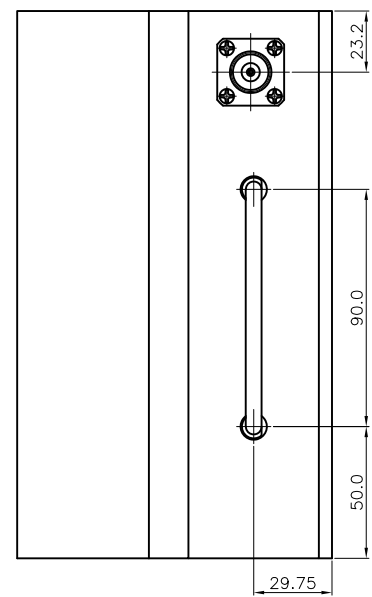


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△	Initial Registration	K.S.KIM	S.L.SON	2021.12.21.

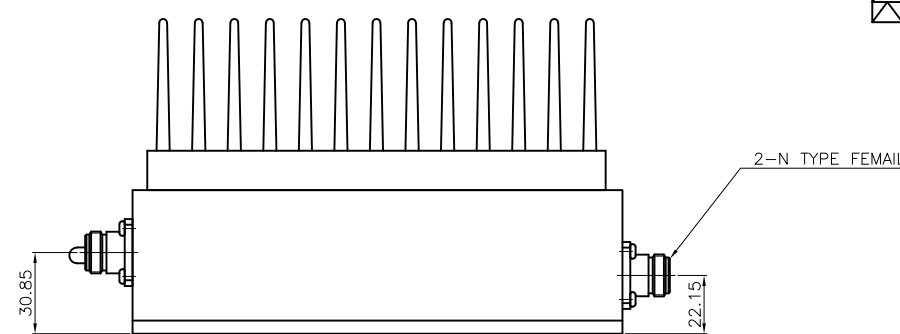

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 600~3000MHz
 Impedance : 50.0Ω
 Attenuation Value : 40.0 ± 1.0dB
 V.S.W.R(Max.) : 1.3 : 1
 PIMD : -155dBc @ 20W -43dBm 2tone
 Power Handling : 100 W Avg.
 * MECHANICAL SPECIFICATIONS
 HOUSING : A6061 (Black DIC-582)
 CONNECTORS PINS : Beryllium Copper
 CONNECTORS BODY : MBsBD
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE	2021. 12. 21.		RF & MICROWAVE TECHNOLOGY TEL : 82-32-347-8015 FAX : 82-32-342-8017
	Angle	APPROVED BY	S.L.SON		
MATERIAL	±1°	CHECKED BY	S.L.SON	TITLE PIMD POWER ATTENUATOR	DWG NO. AT00159-7/1 REVISION 1 SHEET 1 of 1
	A6061	DRAWN BY	K.S.KIM		
FINISH	BLACK(DIC-582)	SCALE	1/1	UNIT	mm