


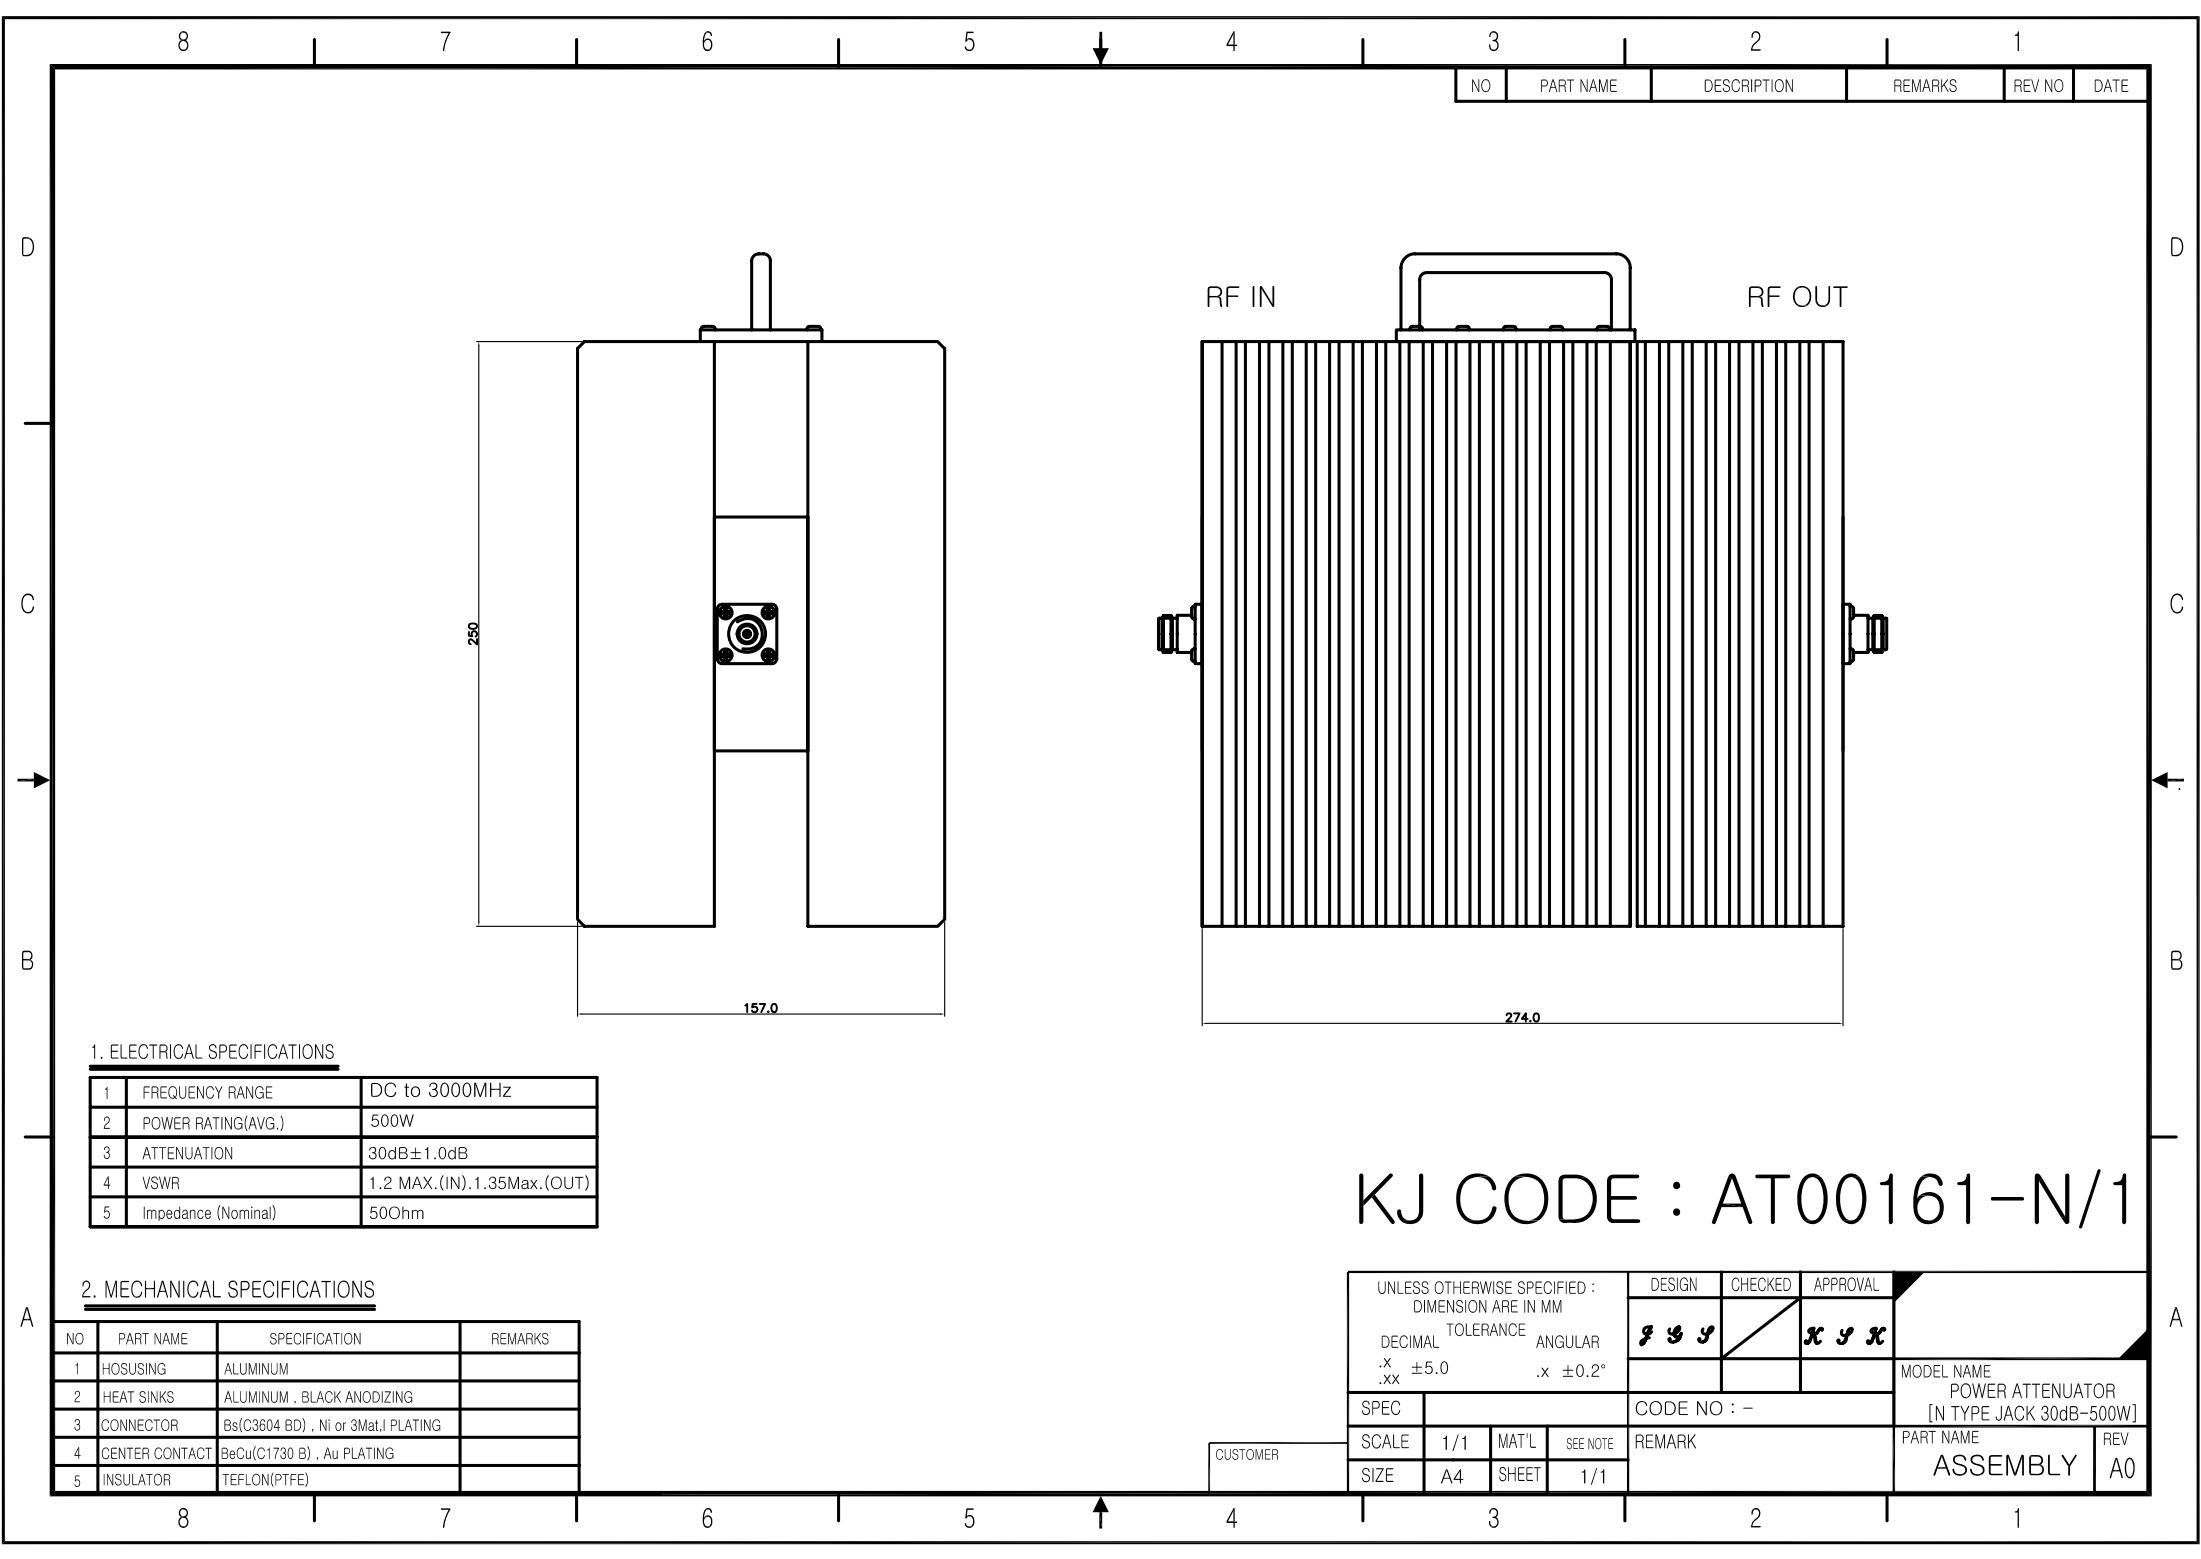

NO	PART NAME	DESCRIPTION	REMARKS	REV NO	DATE
----	-----------	-------------	---------	--------	------

1. ELECTRICAL SPECIFICATIONS

1	FREQUENCY RANGE	DC to 3000MHz
2	POWER RATING(AVG.)	500W
3	ATTENUATION	30dB±1.0dB
4	VSWR	1.2 MAX.(IN).1.35Max.(OUT)
5	Impedance (Nominal)	50Ohm

2. MECHANICAL SPECIFICATIONS

NO	PART NAME	SPECIFICATION	REMARKS
1	HOSUSING	ALUMINUM	
2	HEAT SINKS	ALUMINUM , BLACK ANODIZING	
3	CONNECTOR	Bs(C3604 BD) , Ni or 3Mat,I PLATING	
4	CENTER CONTACT	BeCu(C1730 B) , Au PLATING	
5	INSULATOR	TEFLON(PTFE)	

KJ CODE : AT00161-N/1

UNLESS OTHERWISE SPECIFIED : DIMENSION ARE IN MM DECIMAL TOLERANCE .x ±5.0 .xx	DESIGN	CHECKED	APPROVAL	MODEL NAME POWER ATTENUATOR [N TYPE JACK 30dB-500W]
	<i>f g y</i>	<i>x y x</i>		
SPEC	CODE NO : -			PART NAME ASSEMBLY
SCALE	1/1	MAT'L	SEE NOTE	
SIZE	A4	SHEET	1/1	
REMARK				REV A0