


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.I.CHO	J.H.YOUN	2009.07.11.
2	RF/DC Port 방수 및 PIMD SPEC 추가로 인한 변경	K.I.CHO	J.H.YOUN	2009.09.04.
3	도금사양 및 라벨로변경	S.L.SON	J.H.YOUN	2013.06.20.

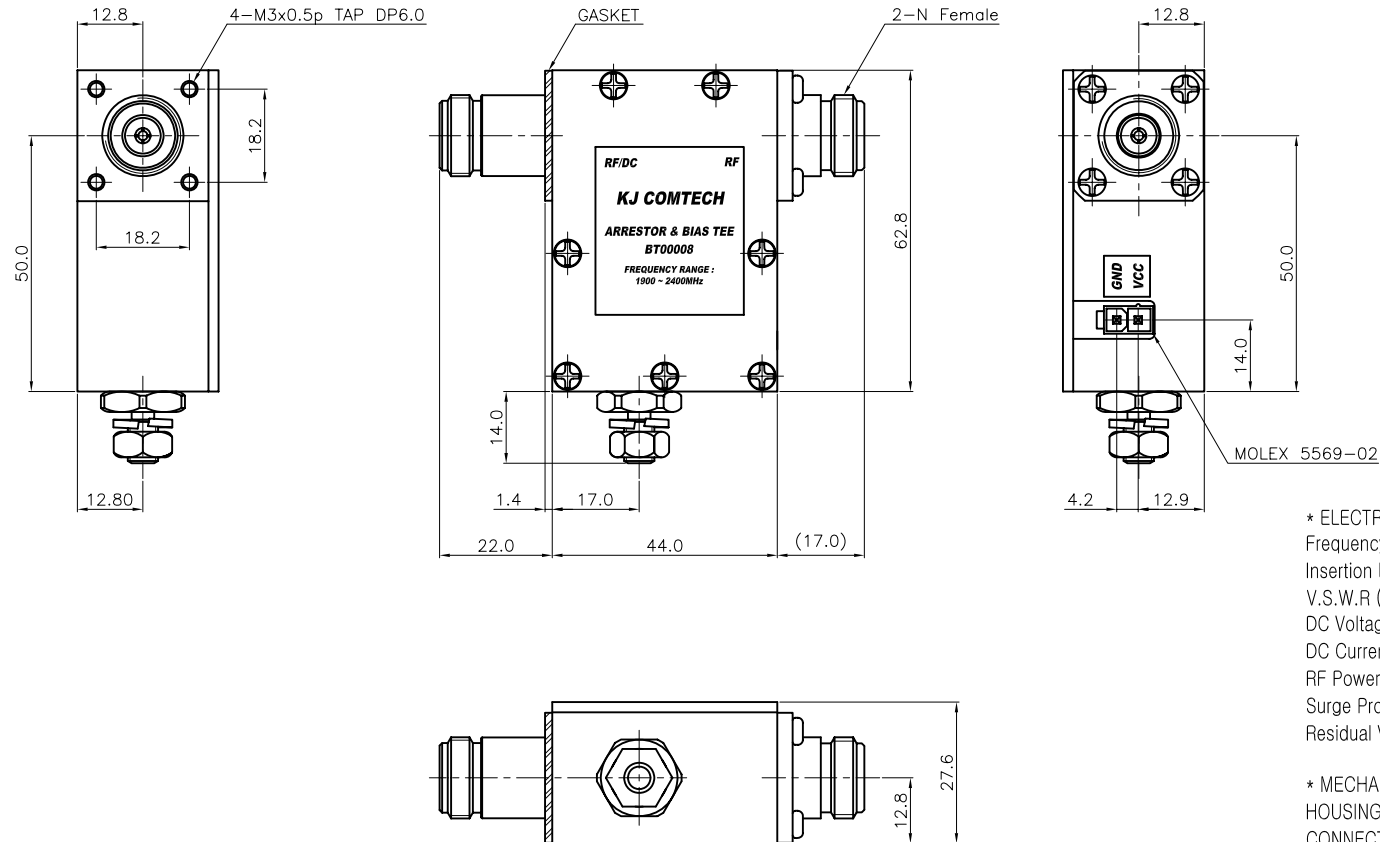

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2400.0MHz
Insertion Loss (Max.) : 0.3dB
V.S.W.R (Max.) : 1.2 : 1
DC Voltage : 12.0V
DC Current (Max.) : 7.0A
RF Power Rating (Max.) : 500.0W
Surge Protection (Max.) : 10kV(1.2/50 μ s), 5kA(8/20 μ s)
Residual Voltage (Max.) : 80.0V @ 6kV(1.2/50 μ s)

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ± 0.3	DATE 2013. 06. 20.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle $\pm 1^\circ$	APPROVED BY J.H.YOUN		
MATERIAL A6061 T6	FINISH White Chromate	CHECKED BY J.H.YOUN	TITLE ARRESTOR & BIAS TEE	
		DRAWN BY S.L.SON		
SCALE 1/1		UNIT mm		A3 DWG NO. BT00008-7/3 REVISION I R SHEET 1 of 1