


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	K.I.CHO	J.H.YOUN	2010.12.08.

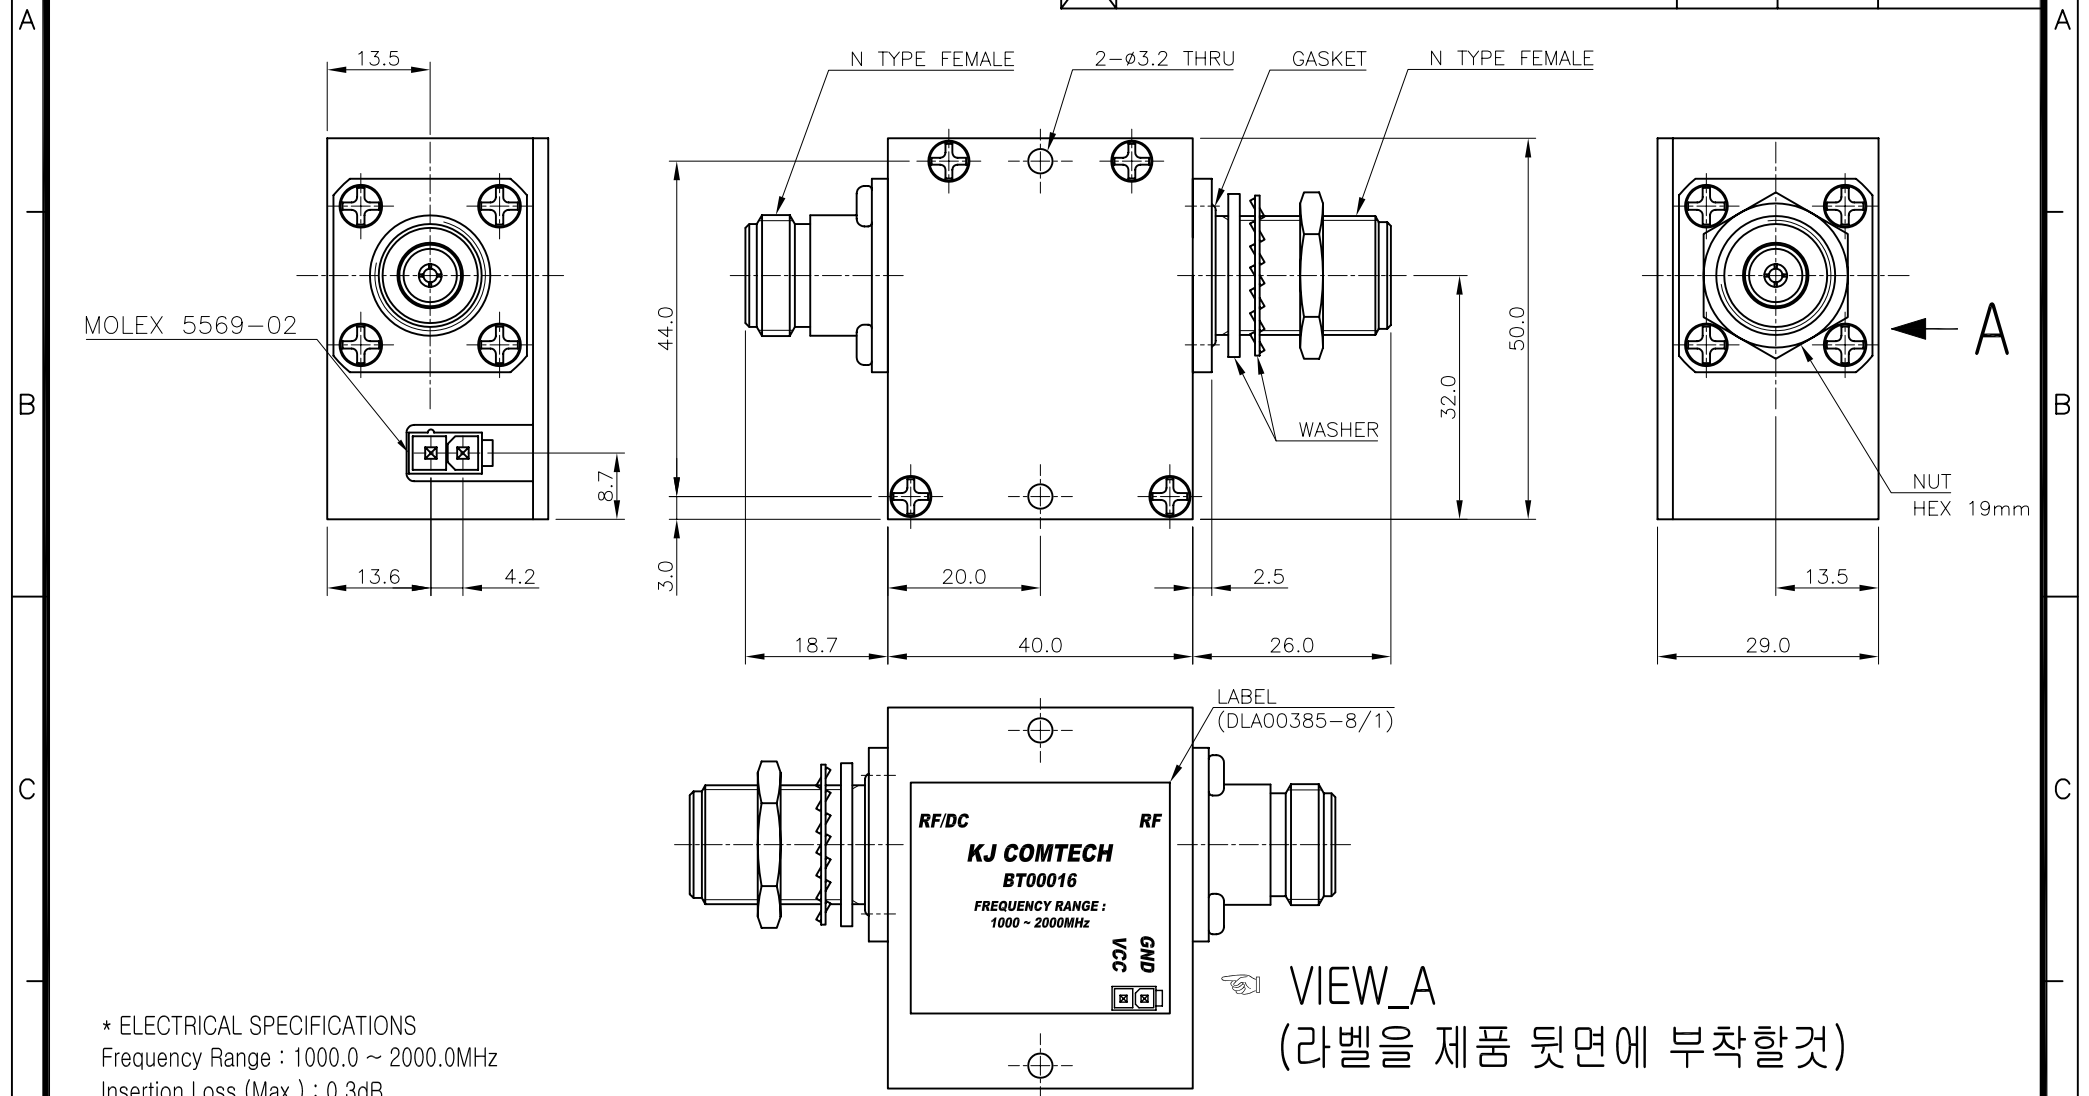

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1000.0 ~ 2000.0MHz
Insertion Loss (Max.) : 0.3dB
V.S.W.R (Max.) : 1.2 : 1
RF Power (Max.) : 200.0W
DC Voltage : 27.0V
DC Current (Max.) : 7.0A
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

VIEW_A
(라벨을 제품 뒷면에 부착할것)

TOLERANCE	Decimal	DATE 2010. 12. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		TITLE BIAS TEE
		DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	DWG NO. BT00016-7/1
		UNIT	mm	REVISION I R SHEET 1 of 1