


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.10.21.

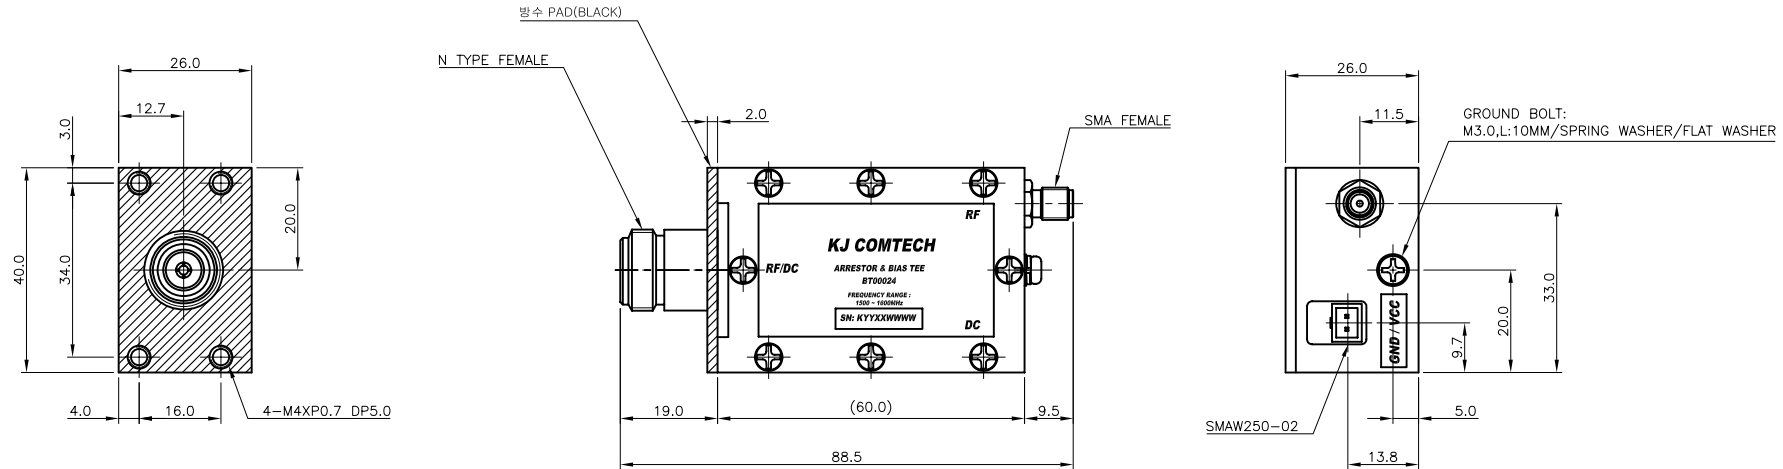

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1500.0 ~ 1600.0MHz
Insertion Loss (Max.) : 0.3dB (온도 -30 ~ +70)
V.S.W.R (Max.) : 1.2 : 1
Pass Band Ripple (Max.): 0.1dB
DC Voltage : 5.0V
DC Current (Max.) : 1.0A
RF Power Rating (Max.) : 1.0W
Surge Protection (Max.) : 6kV(1.2/50μs), 3kA(8/20μs)

* SERIAL NUMBER
- KYYWWXXXX
(YY : YEAR, WW: WEEK, XXXX: NUMBER)
- EX: K14470001

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE 2014. 10. 21.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY J.H.YOUN			
MATERIAL A6061	CHECKED BY T.J.KIM	TITLE Bias Tee			
	DRAWN BY S.L.SON				
FINISH White Chromate	SCALE 1/1	UNIT mm		A3	DWG NO. BT00024-7/1
					REVISION 1