


SMA BIAS TEE(1.5~1.6GHz)

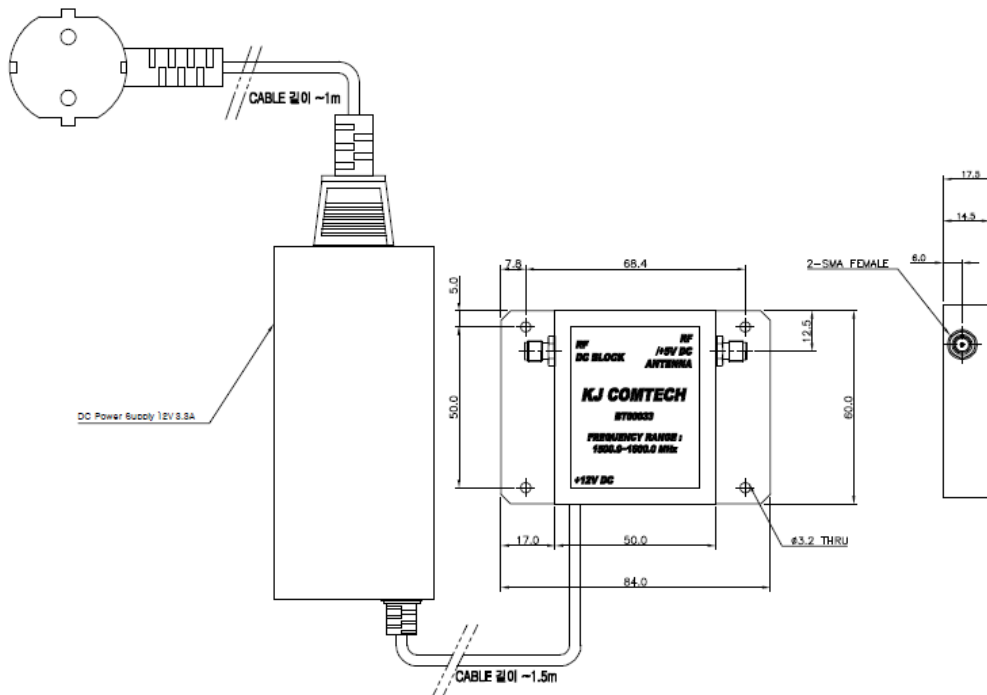


- BT00033-7/1
- 1500~1600 MHz

1. Electrical & Mechanical Specification

Electrical Specifications		
Type		BIAS T
Connector		SMA Type(F)
Frequency Range		1500~1600MHz
Insertion Loss		≤0.5 dB
VSWR		≤1.2 : 1
Power Handling		1W
Impedance		50Ω
BIAS DC Output	Voltage	5V
	Current	1A(Max.)
Mechanical Specifications		
Dimensions(mm)		84.0 x 60.0 x 17.5
Operating Temperature		-40~+70°C
Connector Finish		Ni Plate

2. RF Measurement Data

Trc1 : RF PORT VSWR, Trc2: RF/+5V DC PORT VSWR, Trc3: Insertion Loss

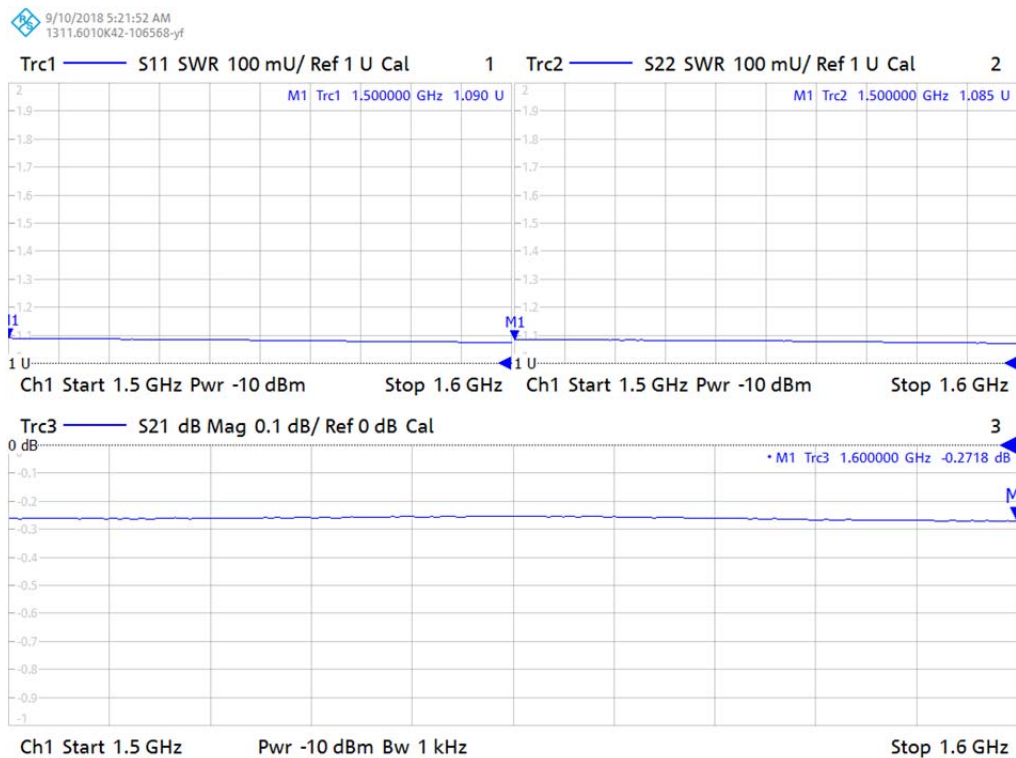

3. DC Measurement

