

COAXPARK

COAX-1.5DHQ

50 Ohm Coaxial Cable

CENTER CONDUCTOR :

COPPER

NOMINAL DIAMETER : 0.54mm

DIELECTRIC :

PE

NOMINAL DIAMETER : 1.6mm

SHIELD :

#1 ALUMINUM TAPE

#2 TINNED COPPER / 95%

JACKET :


PVC

NOMINAL DIAMETER : 3.0±0.05mm

Operating Temperature Rating

- 20°C to +85°C (PVC)

Min. Bend Radius : 13.5mm

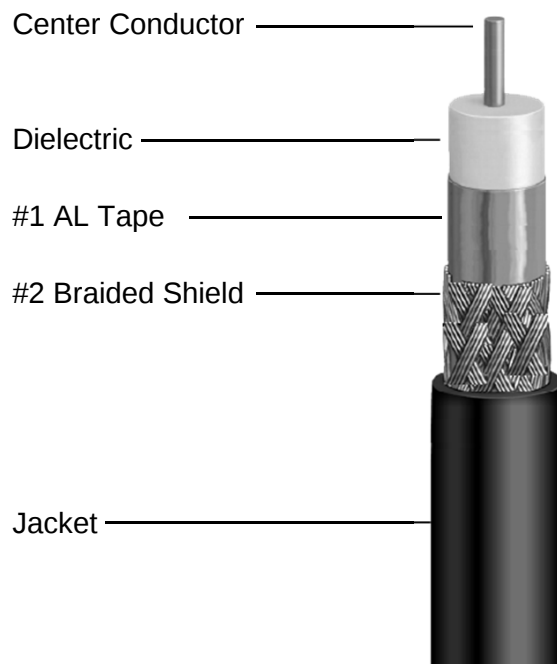

NOM. ATTENUATION

10MHz : 95dB/km

30MHz : 145dB/km

200MHz : 350dB/km

800MHz : 725dB/km

1500MHz : 1045dB/km

2400MHz : 1370dB/km

2600MHz : 1450dB/km

5800MHz : 2450dB/km

ELECTRICAL PROPERTIES

IMPEDANCE : 50Ω

CAPACITANCE : 104 pF/m

