


NRT-200 누 리 텔

Description: LMR CABLE 4.95mm / 50 Ohm

Specification: -----

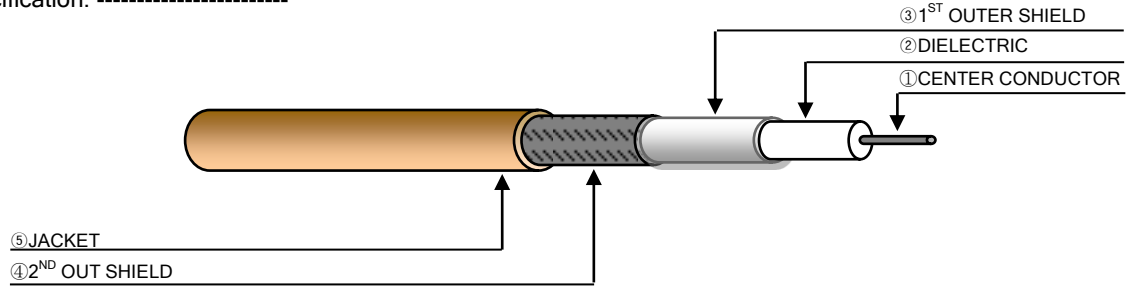

CONSTRUCTION

번호	ITEM	MATERIAL	DIAMETER	WEIGHT[1m]	REMARK
①	CENTER CONDUCTOR	CCA	1.12	8.78g	
②	DIELECTRIC	Foamed PE	3.15	0.90g	
③	1 st OUTER SHIELD	A Tape	3.30	9.03g	
④	2 nd OUTER SHIELD	TCU	3.75	3.56g	90%(nom.)
⑤	JACKET	PVC	5.05	14.0g	BLACK

* Foamed PE: Foamed Polyethylene

* TC: Tinned Copper Braid

ELECTRICAL DATA

ITEM	SPECIFICATION		
CHARACTERISTIC IMPEDANCE	50 ± 5 Ω		
OPERATING FREQUENCY	3 GHz		
OPERATING TEMP	-10℃ ~ +85℃		
WEIGHT	36.14g/1m		
SHIELDING EFFECTIVENESS	>90dB		
ROHS	COMPLIED		
VSWR	1:1.2 ↓		
최소굴곡 반경	50.8 mm		
MAXIMUM ATTENUATION	Frequency (MHz)	dB/100M	Power (Watts)
	824	31.0	
	894	32.0	
	1700	46.0	
	2170	54.0	
	2700	60.0	