

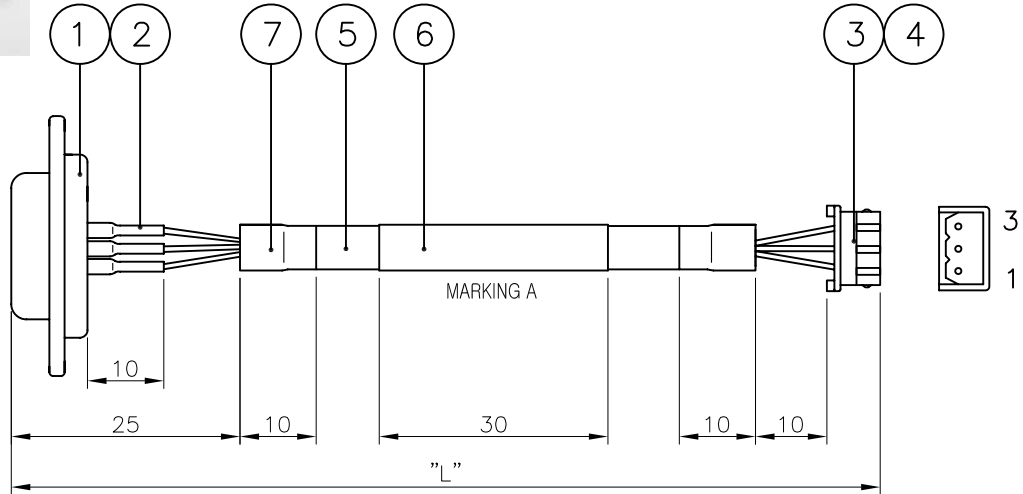


REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2017. 11. 17.



DS1033-09F (후면 플레이트 RS232)	Signal	Cable 색상	51021-0300 (SELF DIAGNOSIS Board J5)
1		Not Connected	
2	RXD	빨강	RXD
3	TXD	흰색	TXD
4		Not Connected	
5	GND	검색	GND
6		Not Connected	
7		Not Connected	
8		Not Connected	
9		Not Connected	

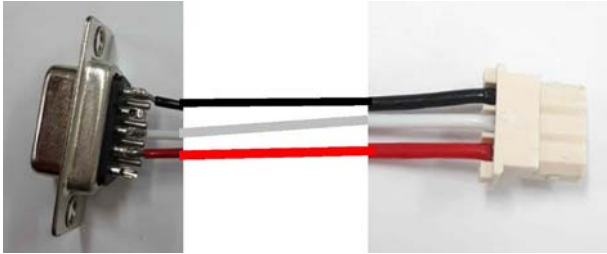

7	슬리브,열수축식	0.02m	에이스(KR)	—	BLACK ø6
6	슬리브,표시용	0.03m	에이스(KR)	—	WHITE ø6
5	케이블,전기용	—	대륙전선(KR)	AWG24 3C (UL2464)	BLACK
4	연결기,플러그형,전기용	3	MOLEX(US)	5263	
3	연결기,플러그형,전기용	1	MOLEX(US)	5264-03	
2	슬리브,열수축식	0.03m	에이스(KR)	—	BLACK ø2
1	연결기,리셉터클형,전기용	1	CONNFLY(CN)	DS133-09F	



MARKING A

*라벨추가(표시용)
표시용 색상 : 흰색 수축튜브에 검은색 글씨
표시용 위치 : 케이블 정중앙

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2017. 11. 17.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE DEBUG (Control DEBUG 케이블)		
	DRAWN BY	S.Y.EUN				
	CHECKED BY			A4 DWG NO. CD00229-7/1 DETAIL NO. REVISION I R SHEET 1 of 1		
	SCALE	UNIT				
	N/S	mm				

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%