


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018. 09. 05.

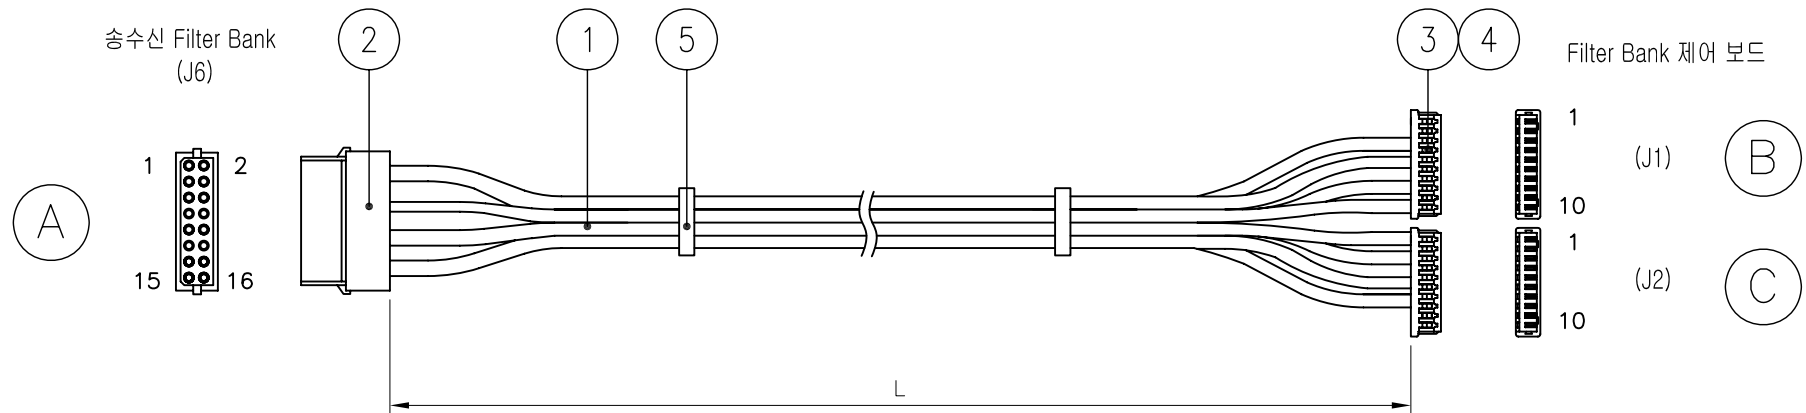

M80-8881605


51021-1000

표1.

길 이		공 차
이 상	까 지	
0	300	0,+25
301	2000	0,+50
2001	-	0,+76

주기

1. 작업은 IPC/WHMA-A-620에 따를 것
2. 연결은 신호연결 배선도를 참조할 것
3. 길이 공차는 표1을 참조할 것
4. 성능은 다음을 만족할 것
 - 가. 도통시험 : 연결기 핀간 DC 저항 측정시 3Ω 이하
5. 상용품 품번 1~2은 품질 성능을 만족하는 동등 이상품 사용가능

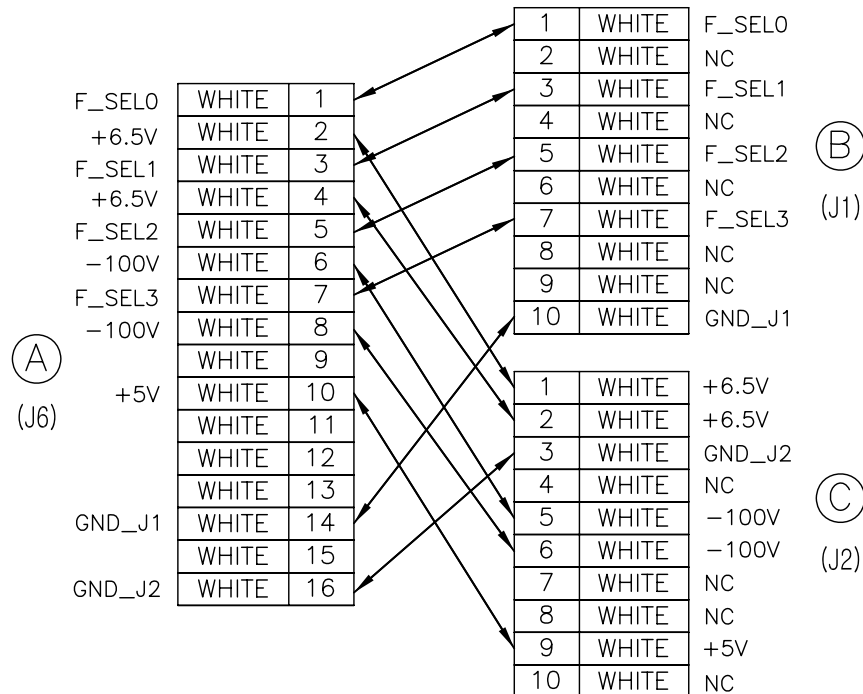

5	ROPE	2	—	MIL-T-43435	500mm
4	TERMINAL PIN	20	Molex	50079-8000	
3	CONNECTOR	2	Molex	51021-1000	
2	CONNECTOR	1	HARWIN	M80-8881605	(고객 사급품)
1	WIRE		LS전선	LGM81044/12-26-9	AWG26

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS		
	DATE 2018. 09. 05.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
CUSTOMER CODE	APPROVED BY	I.C.KIM						
	CHECKED BY			TITLE				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN						
	CHECKED BY							
	SCALE	UNIT			A4	DWG NO.	CD00287-7/1	
	N/S	mm				DETAIL NO.		
				REVISION	I R	SHEET	1 of 1	