




REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2019. 04. 10.

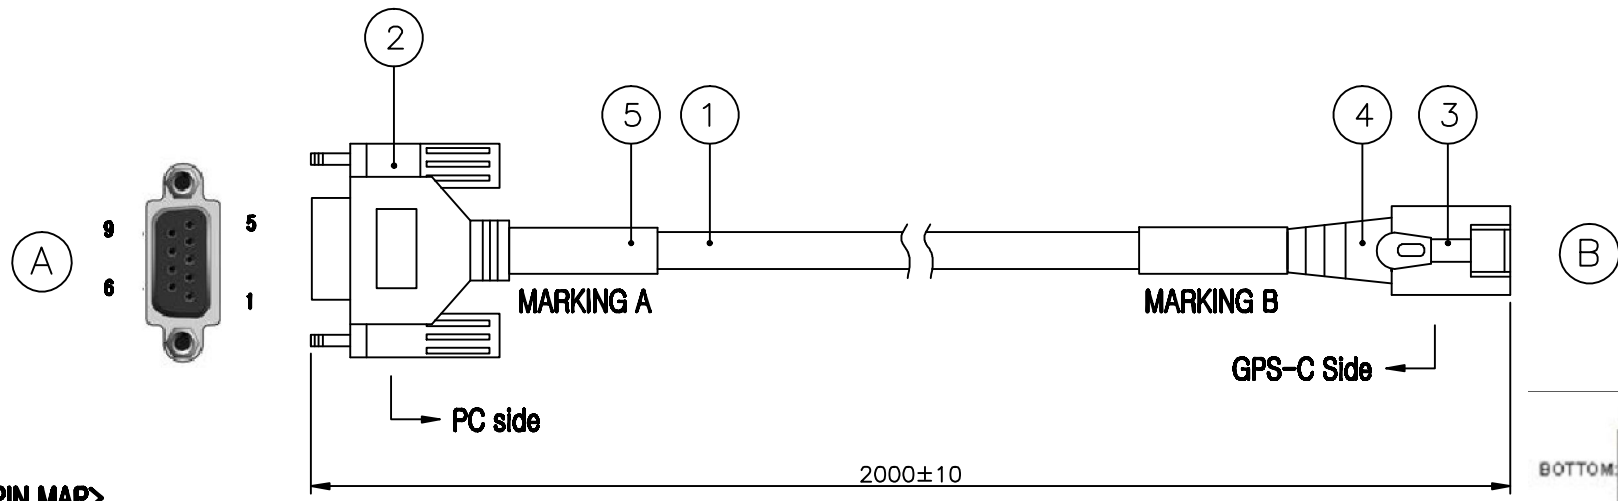


<PIN MAP>

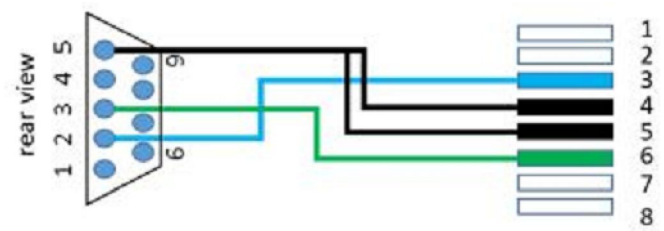

DB-9		RJ45	
SIGNAL	PIN	PIN	SIGNAL
-	-	1	-
-	-	2	-
RXD	2	3	TXD
GND	5	4	GND
GND	5	5	GND
TXD	3	6	RXD
-	-	7	-
-	-	8	-

사용 가능한 pin은 1,2,7,8 번 핀입니다.

*GPS-C & GPS-RC are available to the public.

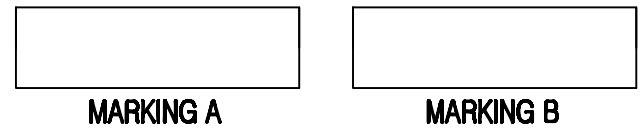

5	MARKING TUBE	2	—	—	WHITE
4	부트	1	—	—	
3	CONNECTOR	1	—	RJ-85	
2	D-SUB	1	—	—	9P-FEMALE
1	CABLE		LS전선		AWG24

CUSTOMER		NO.		DESCRIPTION		Q'TY		SPEC		PART NO.		REMARKS	
DATE		2019. 04. 10.		APPROVED BY		I.C.KIM		CHECKED BY		S.Y.EUN		TITLE	
CUSTOMER CODE		DRAWN BY		S.Y.EUN		CHECKED BY		SCALE		UNIT		mm	
CABLE LENGTH TOLERANCE		0 ~ 1000mm : +5, -0		1000 ~ 2000mm : +10, -0		2000 ~ 3000mm : +15, -0		3000 ~ 4000mm : +20, -0		4000 ~ 5000mm : +25, -0		5000 ~ : +10%	
DATE		2019. 04. 10.		APPROVED BY		I.C.KIM		CHECKED BY		S.Y.EUN		TITLE	
CUSTOMER CODE		DRAWN BY		S.Y.EUN		CHECKED BY		SCALE		UNIT		mm	
CABLE LENGTH TOLERANCE		0 ~ 1000mm : +5, -0		1000 ~ 2000mm : +10, -0		2000 ~ 3000mm : +15, -0		3000 ~ 4000mm : +20, -0		4000 ~ 5000mm : +25, -0		5000 ~ : +10%	
DATE		2019. 04. 10.		APPROVED BY		I.C.KIM		CHECKED BY		S.Y.EUN		TITLE	
CUSTOMER CODE		DRAWN BY		S.Y.EUN		CHECKED BY		SCALE		UNIT		mm	
CABLE LENGTH TOLERANCE		0 ~ 1000mm : +5, -0		1000 ~ 2000mm : +10, -0		2000 ~ 3000mm : +15, -0		3000 ~ 4000mm : +20, -0		4000 ~ 5000mm : +25, -0		5000 ~ : +10%	



TITLE		CISCO 케이블	
DWG NO.		CD00307-7/1	
DETAIL NO.		REVISION	
A4		R	
SHEET		1 of 1	