


MARKING - X


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 07. 19.




222C06M12-0004-4320

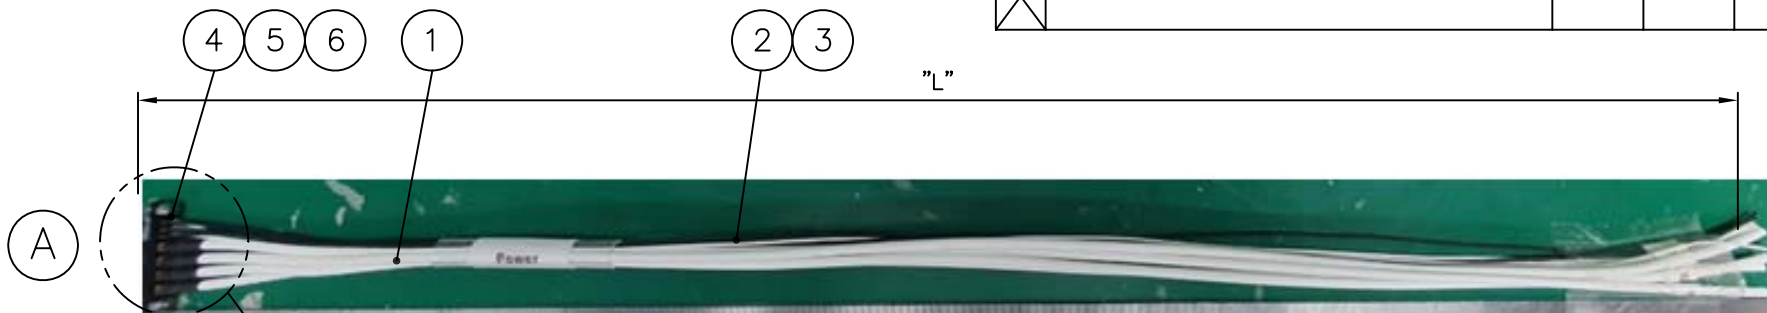


고정 Pin 분실 주의

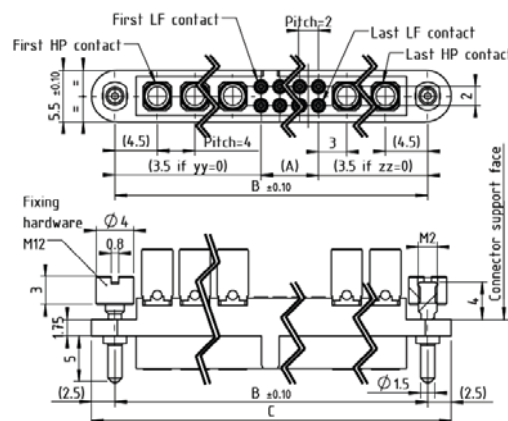

LF contact C13064-P
type "C" to crimp
or to solder
scale : 3:1

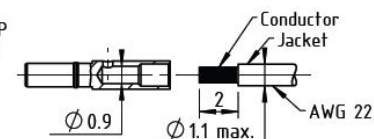

HP contact
30-4320
to crimp or
to solder
Scale : 3:1

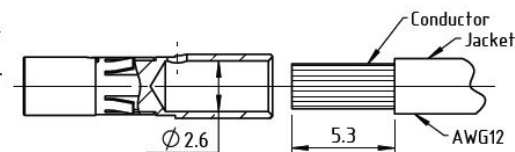

222C06M12-0004-4320

Pad#	Name	Remark
L1	+15V	LF WHITE
L2	-6V	LF WHITE
L3	-35V	LF WHITE
L4	GND	LF BLACK
L5	GND	LF BLACK
L6	GND	LF BLACK
H1	28V	HP WHITE
H2	GND	HP WHITE
H3	+5V	HP WHITE
H4	GND	HP WHITE

6	TERMINAL PIN	4	—	30-4320	
5	TERMINAL PIN	6	—	C13064-P	C Type
4	HOUSING	1	—	222C06M12-0004-4320	
3	WIRE	3	—	AWG22	BLACK
2	WIRE	3	—	AWG22	WHITE
1	WIRE	4	—	AWG12	WHITE

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS
	DATE	2021. 07. 19.				
	CUSTOMER CODE	APPROVED BY	I.C.KIM			
	CABLE LENGTH TOLERANCE	CHECKED BY				
CABLE LENGTH TOLERANCE	0 ~ 1000mm	DRAWN BY	S.Y.EUN			
	1000 ~ 2000mm	CHECKED BY				
	2000 ~ 3000mm	SCALE	UNIT			
	3000 ~ 4000mm	2/1	mm			
				TITLE		
				SIGNAL CABLE		
				DWG NO.		
				CD00393-7/1		
				DETAIL NO.		
				REVISION		
				I R SHEET		
				1 of 1		