

CF00155-7/1

CF00155-7/1 1.5M

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

1.5M -
S11/S22/S21
(SWR, SWR, dB)

■ _0.5GHz	- 1.14, 1.13, 0.98
■ _1.0GHz	- 1.22, 1.15, 1.46
■ _1.5GHz	- 1.25, 1.15, 1.89
■ _2.0GHz	- 1.26, 1.14, 2.25
■ _3.0GHz	- 1.47, 1.34, 2.98
■ _4.0GHz	- 1.43, 1.09, 3.58

BNC-PS+SMA-PS

+RG174

BNC PS RG316

BO/NI, PI/GO, CC/BR/NI

SMA PS RG316

BO/GO, PI/GO, CH/BR/NI

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)


AD00006-7/2

■ BNC (J) SMA (J) ST


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

CF00155


Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

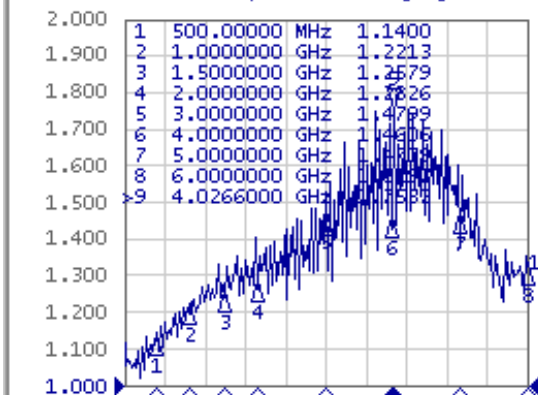

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

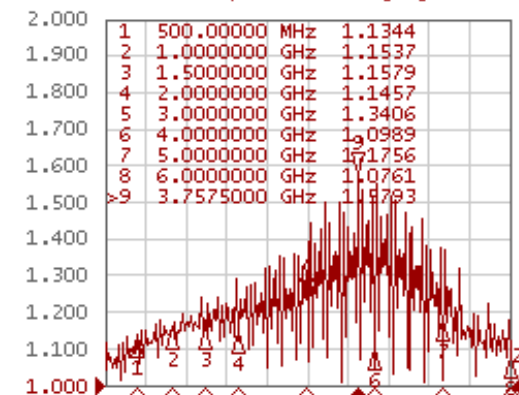

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]

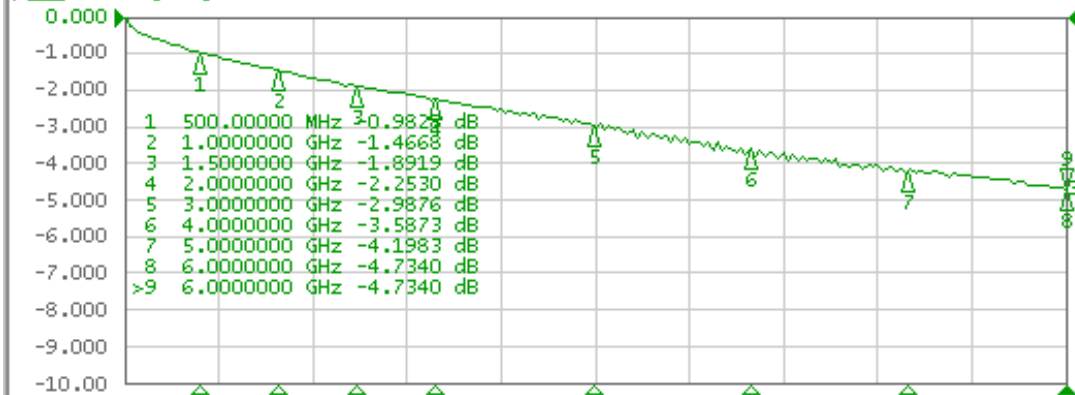

1 Start 20 MHz

IFBW 70 kHz

Stop 6 GHz

Meas Stop ExtRef Ready Svc 1988-01-01 06:32

Display

Allocate Channels

Num of Traces
3

Allocate Traces

Display Data

Data -> Mem

Data Math
OFF

Equation Editor...

Equation
OFF

Edit Title Label

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)