


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR : 1.2(Max)


REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2008.07.31.

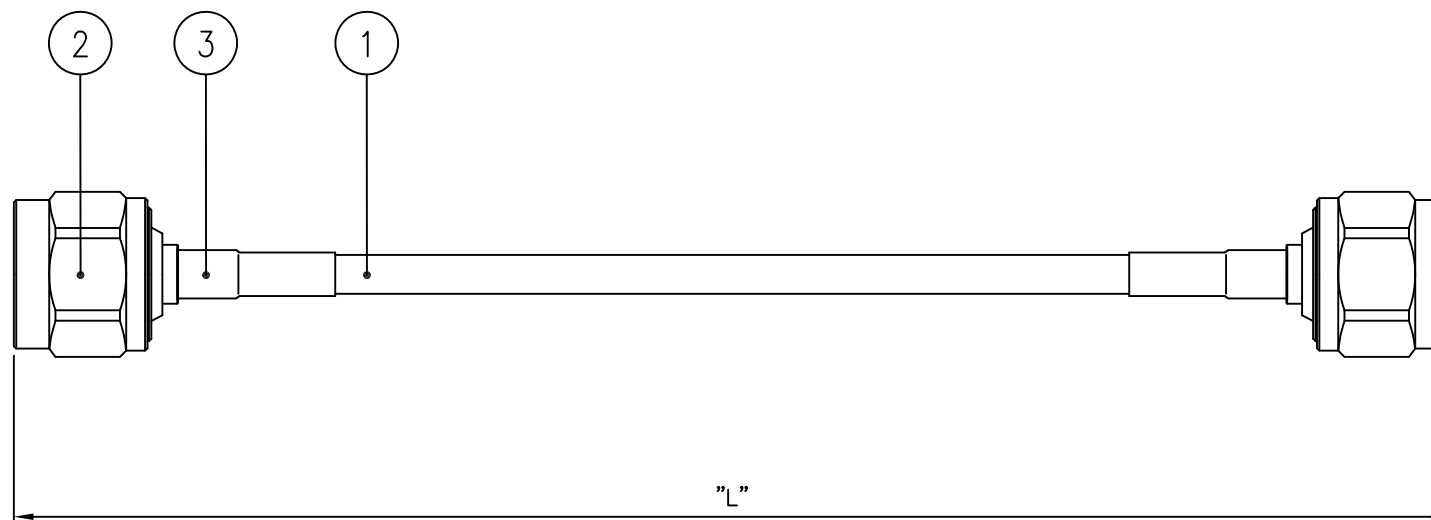

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1.N50 PS-----▷▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

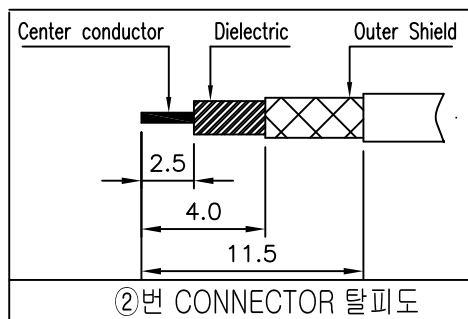

3	SHRINK TUBE	2	LS TUBE	ATU00060-N/1	Ø6 20mm - Black
2	CONNECTOR	2	KJ COMTECH	CN02397-7/2	N50-PS
1	COAXIAL CABLE		NURITEL	ACA00057-N/1	RG58 (BLACK)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE		2008. 07. 31.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
APPROVED BY							
CHECKED BY				TITLE CABLE ASS'Y			
DRAWN BY		S.H.KIM					
CHECKED BY							
SCALE	UNIT		A4	DWG NO.	CF00252-7/1		
N/S	mm			DETAIL NO.			
				REVISION	I R	SHEET	1 of 1

CUSTOMER
CUSTOMER CODE
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%