

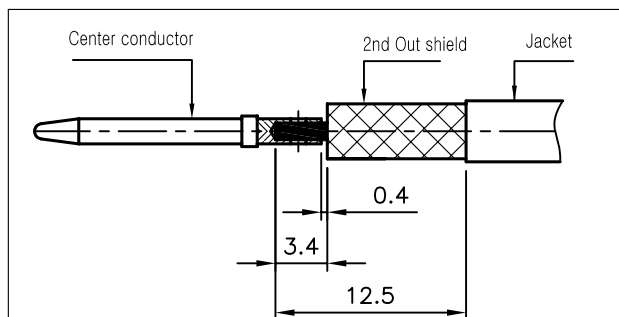


1. IMPEDANCE : 50ohm (Nominal)
2. Frequency Range : DC~10GHz
3. VSWR(Max) : 1.2


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.05.22.

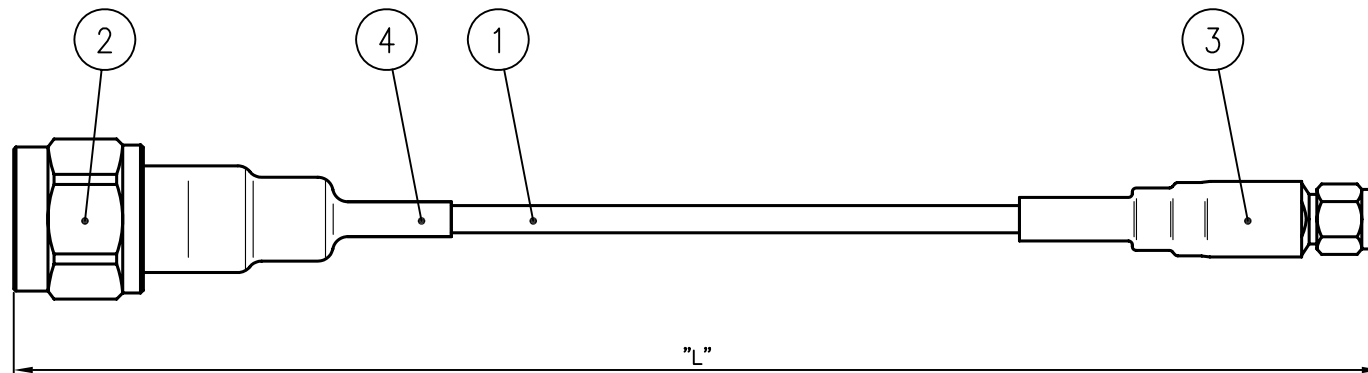

2번 CONNECTOR 탈피도

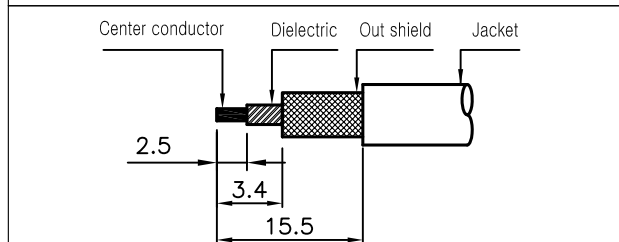

3번 CONNECTOR 탈피도

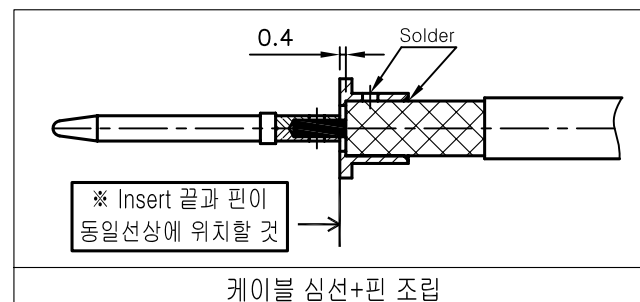

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N PS----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. SMA50 PS----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : SUS Plating

4	BONDING TUBE	2	LS TUBE	ATU00012-N/1	Ø12-60mm-BLACK
3	CONNECTOR	1	KJ COMTECH	CN02764-7/8	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN01262-7/4	N50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Ω)-BLUE
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 05. 22.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE CABLE ASS'Y		
	DRAWN BY	S.Y.EUN				
	CHECKED BY			A4	DWG NO.	CF00266-7/3
	SCALE	UNIT			DETAIL NO.	
	N/S	mm			REVISION	I R