

- Prepared by : Kim in cheol
- Report Date : 2019. 06. 26

CF00266-7/3

VSWR:1.2@DC~10GHz



N-PS+SMA-PS

+141MF(BLUE)

N PS (~10GHz)

BO/NI, PI/GO, CH/BR/NI


SMA PS (~27GHz)

BO/GO, PI/GO, CH/BR/NI

Electrical Specifications	
Frequency Range	~11GHz
Insertion Loss	-2.3 dB (Min.)
VSWR	1.2 : 1 (Max.)
Impedance (Nominal)	50Ω
Mechanical Specifications	
Length(mm)	L: 1000
Operating Temperature	-40~+85°C
Connector Material & Finish	BRASS / Nickel Plate

- ▶ 측정 장비: ROHDE & SCHWARZ / ZVA50 (VECTOR NETWORK ANALYZER 10MHz~50GHz)
- ▶ 측정 Test cable : 2.4mm Female to 2.4mm Male 50GHz Cable (ROHDE & SCHWARZ) / 2ea
- ▶ 측정 Adaptor : N50 Female to SMA50 Female / KJ Code (AD00424-7/1)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

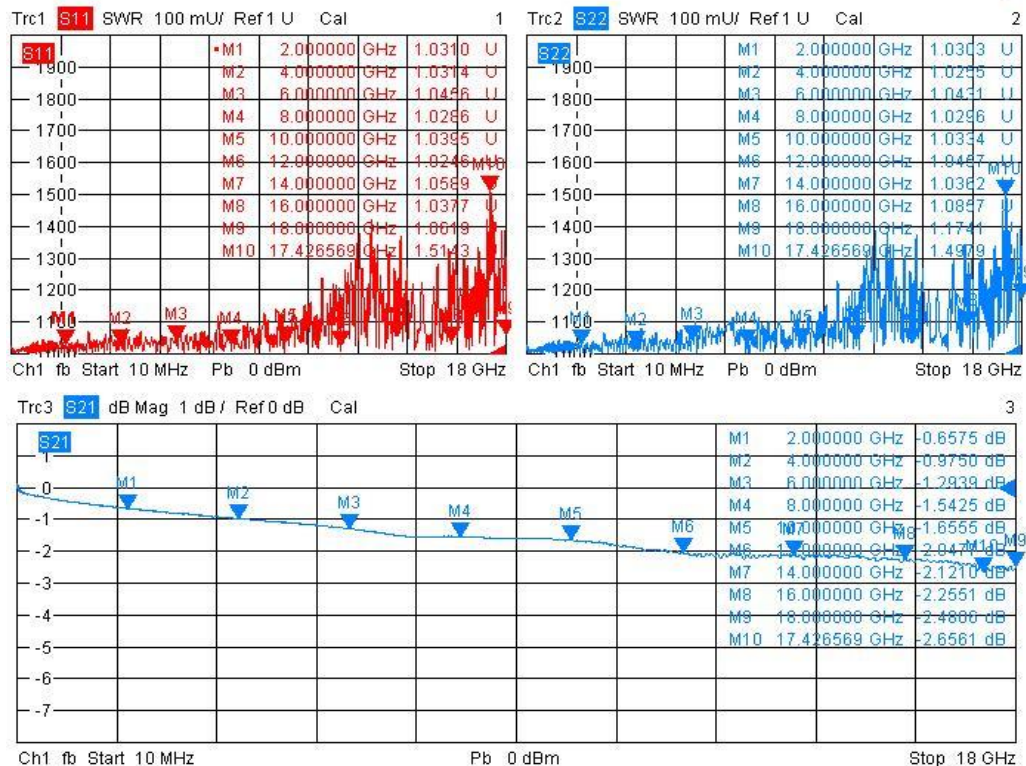

6/26/2019, 7:16 PM