


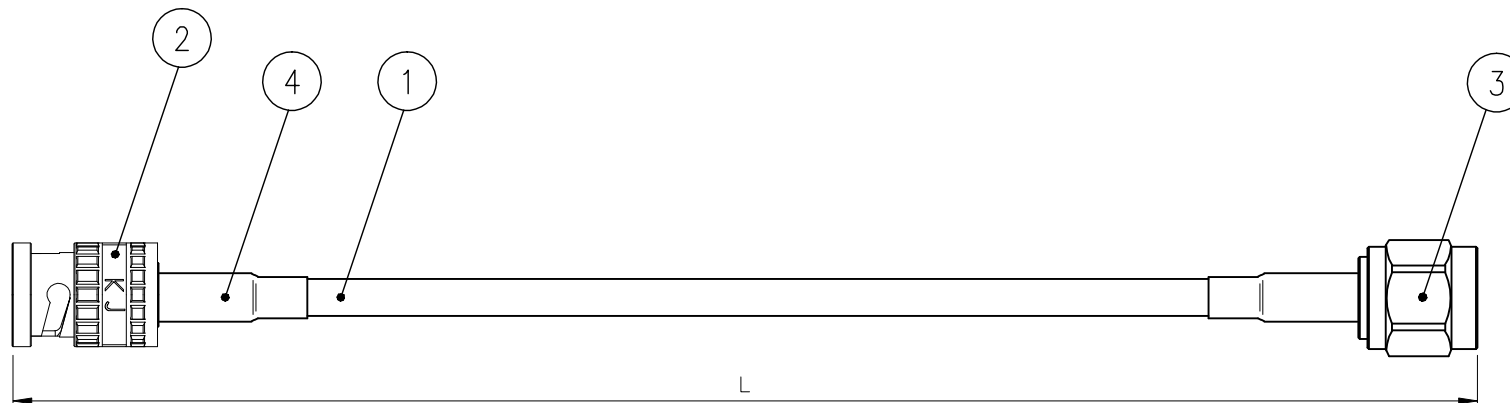

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - BNC-PS BODY/BRASS/NICKEL PIN/BRASS/Gold CIR-CAP/ZnDC/NICKEL
 - TNC-PS BODY/BRASS/Nickel PIN/BRASS/Gold HEX-CAP/BRASS/NICKEL

REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.M.LEE	I.C.KIM	2015. 2. 15.

	4	SHRINK TUBE	2	LS TUBE	ATU00060-N/1	Ø6 20mm - Black
	3	CONNECTOR	1	KJ COMTECH	CN00375-7/3	TNC50-PS
	2	CONNECTOR	1	KJ COMTECH	CN00249-7/3	BNC50-PS
	1	COAXIAL CABLE		NURI	ACA00099-N/1	RG223 (GRAY)
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE			2015. 2. 15.		
CUSTOMER CODE	APPROVED BY		I.C.KIM		 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017	
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY		S.M.LEE		TITLE CABLE ASS'Y	
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				A4	DWG NO.	CF00362-7/1
					DETAIL NO.	
					REVISION	I R SHEET 1 of 1

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%