


ELECTRICAL DATA :

1. IMPEDANCE (Nominal) : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.25


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.07.01.

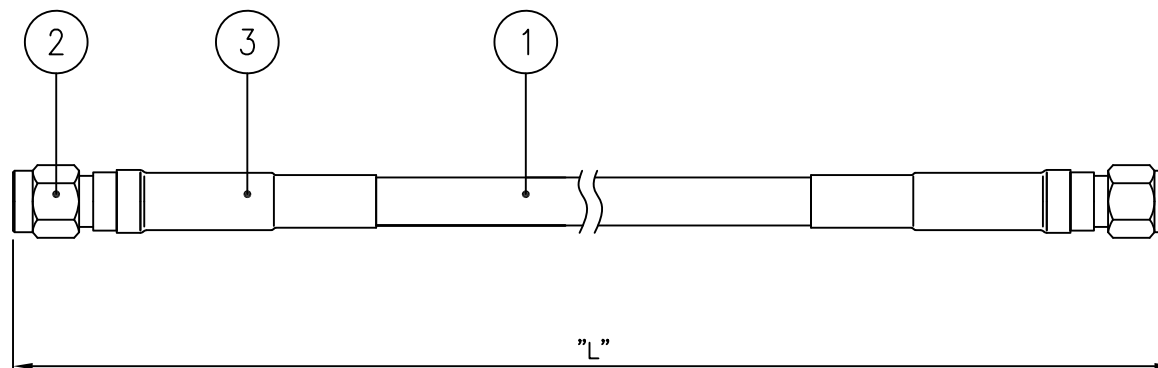



Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. SMA PS-- ▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
3. 방수 : IP67 적용

* SMA 본딩튜브 바디 위로 올려서 수축할 것
(도면형상 참조)



■ 압착 시 HEX 6.5(+원형) 중간 Tool 사용할 것
- Tool : DEQ01193-N/1

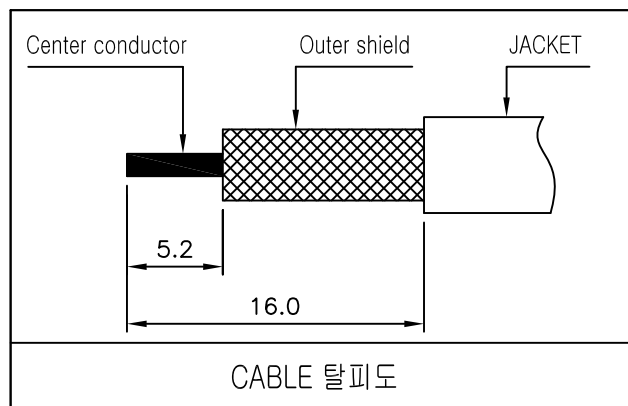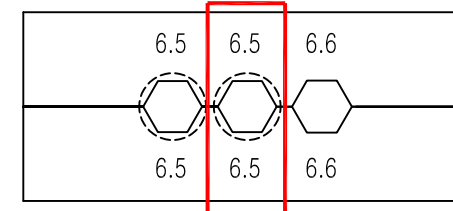

3	BONDING TUBE	2	LS TUBE	ATU00007-N/1	Ø8~40 Black (두께 두꺼운 제품)	
2	CONNECTOR	2	KJ COMTECH	CN00959-7/3	SMA50 PS	
1	COAXIAL CABLE		COAXPARK	ACA00056-N/1	LMR240(50Ω)	
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-81 Fax : 82-32-347-81 KJ COMTECH CO.,LTD.		2022. 07. 01.	
APPROVED BY		S.H.KIM				
CHECKED BY						
DRAWN BY		S.Y.EUN				
CHECKED BY				TITLE CABLE ASSEMBLY		
SCALE		UNIT				
N/S		mm		A4 DWG NO. CF00398-7/1 DETAIL NO. REVISION I R SHEET 1 of 1		