


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2

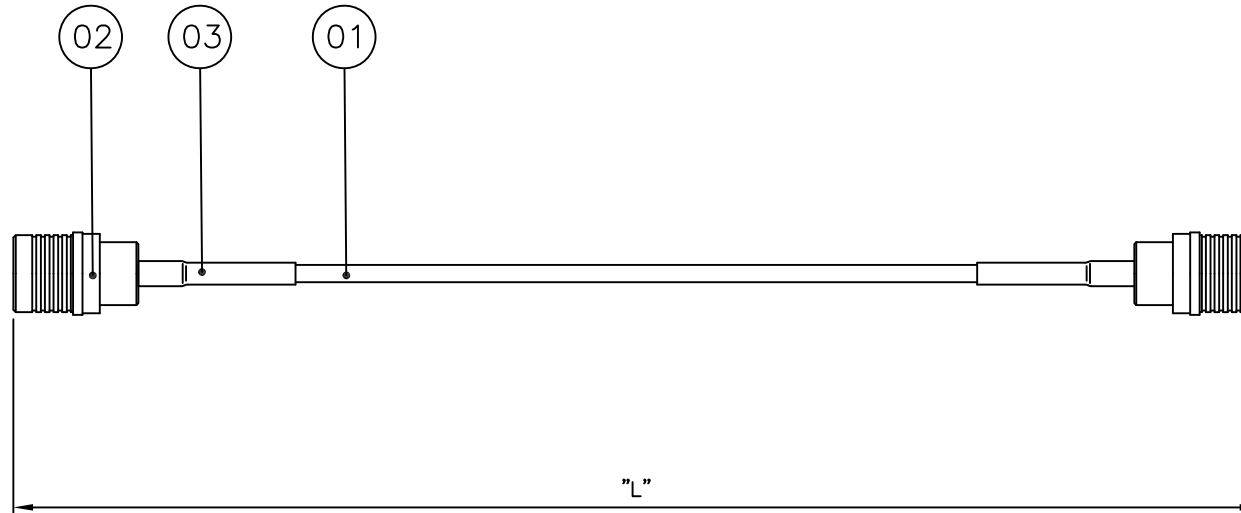

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. QMA PS---▶▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
I R	Initial Registration	S.Y.EUN	S.H.KIM	2022.06.27.

3	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4-20mm (Black)
2	CONNECTOR	2	KJ COMTECH	CN02537-7/4	QMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316(50Ω) (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2022. 06. 27.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	S.H.KIM					TITLE CABLE ASS'Y
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		A4 DWG NO. CF00496-7/2 DETAIL NO. REVISION R SHEET 1 of 1			
	CHECKED BY						
	SCALE	UNIT					
	N/S	mm					