


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010. 02. 25.

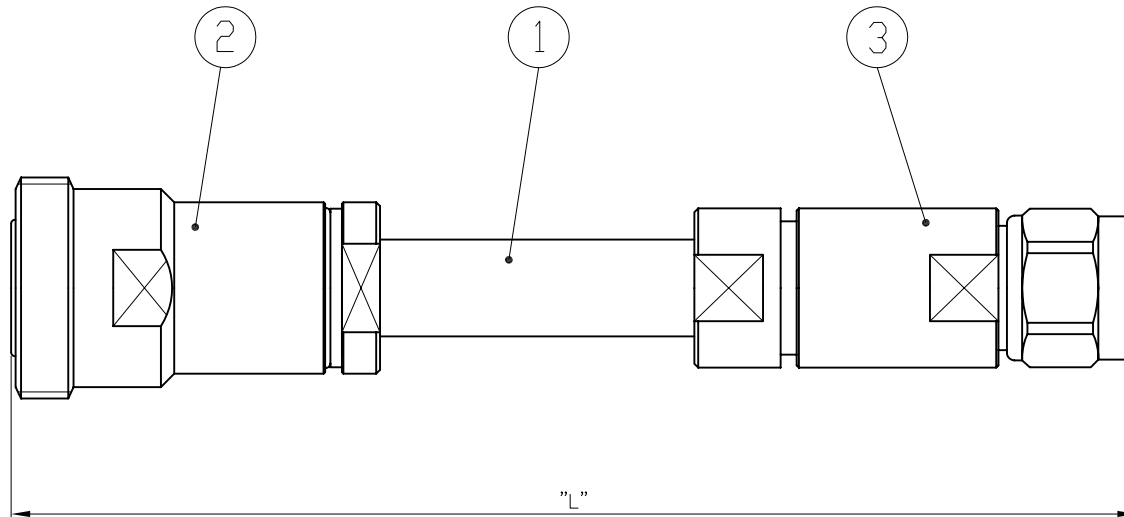

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. DIN50 JS ---▶ BODY : Nickel Plating
CONTACT : Gold Plating
BACK NUT : Nickel Plating
 - 2-2. N50 PS -----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
BACK NUT : Nickel Plating

ELECTRICAL SPEC

Length: 1 meter
 Freq range: 0~2200MHz
 Insertion Loss: < 1db
 Return Loss < 26db
 Passive Intermodulation Products <-110dbm@2x20w
 Impedance: 50 ohms
 Power handling > 500w
 Operating Temp <-10c to > +50c
 Weatherproof: IP65

3	CONNECTOR	1	KJ COMTECH	CN00771-7/1	N50-PS
2	CONNECTOR	1	KJ COMTECH	CN00577-7/2	7/16 DIN50-JS
1	COAXIAL CABLE	1	FLONTEC	ACA00006-N/1	1/2"SF(50㉔) (BLACK)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE 2010. 02. 25.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
APPROVED BY Y.H.CHOI					
CHECKED BY I.C.KIM					
DRAWN BY D.W.KANG					
CHECKED BY			TITLE CABLE ASS'Y		
SCALE 1/1					
UNIT			A4		
			DWG NO.		CF00500-7/1
			DETAIL NO.		
			REVISION		I R SHEET 1 of 1