


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010. 02. 25.

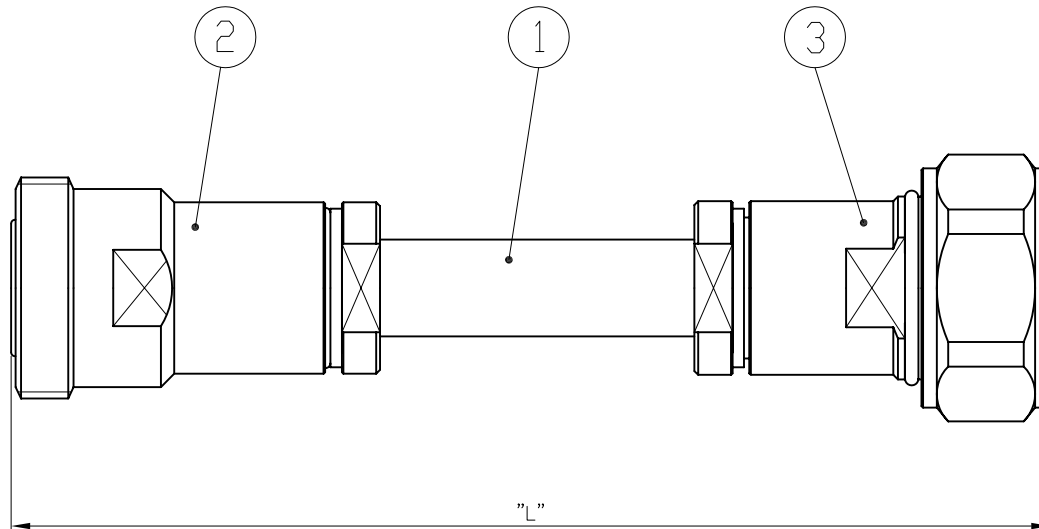

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. DIN50 JS --> BODY : Nickel Plating
CONTACT : Gold Plating
BACK NUT : Nickel Plating
 - 2-2. DIN50 PS --> BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
BACK NUT : Nickel Plating

ELECTRICAL SPEC

Length: 1 meter
 Freq range: 0~2200MHz
 Insertion Loss: < 1db
 Return Loss < 26db
 Passive Intermodulation Products <-110dbm@2x20w
 Impedance: 50 ohms
 Power handling > 500w
 Operating Temp <-10c to > +50c
 Weatherproof: IP65

3	CONNECTOR	1	KJ COMTECH	CN00569-7/2	7/16 DIN50-PS	
2	CONNECTOR	1	KJ COMTECH	CN00577-7/2	7/16 DIN50-JS	
1	COAXIAL CABLE	1	FLONTEC	ACA00006-N/1	1/2"SF(50㉔) (BLACK)	
NO.		DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2010. 02. 25.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
APPROVED BY		Y.H.CHOI				
CHECKED BY		I.C.KIM				
DRAWN BY		D.W.KANG				
CHECKED BY						TITLE CABLE ASS'Y
SCALE		UNIT				
1/1						
			A4	DWG NO.	CF00501-7/1	
				DETAIL NO.		
			REVISION	I	R	SHEET 1 of 1

