


CF00503-7/1

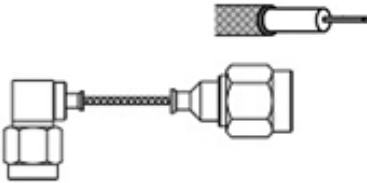

SMA-PL+SMA-PS+47F

SMA PL 47TP

BO/GO, PI/GO, CH/BR/GO

SMA PS 47TP ↔

BO/GO, PI/GO, CH/BR/NI

CF00503-7/1 150mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

- ▶ NETWORK ANALYZER
- ▶ Test cable
- ▶ Test Adaptor
- ☐ E5071B (~8.5GHz)

☒ ZVA50 (~50GHz)
- ☒ N Male to SMA Male

10GHz Cable (CF00540-7/1)
- ☒ SMA (J) SMA (J) ST

AD00006-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

