

REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010. 03. 03.


Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. MCX50-LP ---->▷ BODY : Gold Plating
CONTACT : Gold Plating
COVER : Gold Plating
JACK : Gold Plating

2-2. N50-JB(F/N) -->▷ BODY : Nickel Plating
CONTACT : Gold Plating
BACK NUT : Nickel Plating
NUT : Nickel Plating
WASHER : Nickel Plating

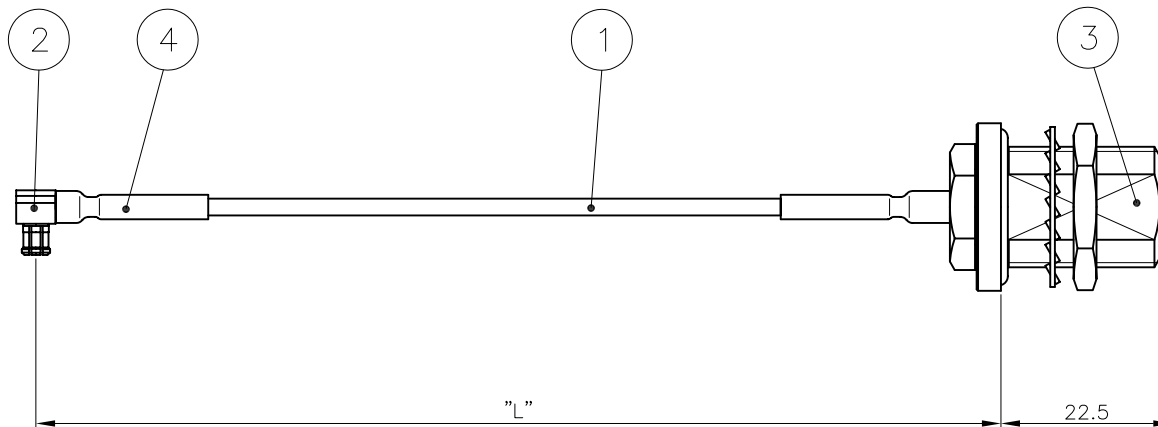

4	BONDING TUBE	2	SUMITOMO	ATU00004-N/1	Ø4x20 Black
3	CONNECTOR	1	KJ COMTECH	CN01220-7/2	N50-JB(F/N)
2	CONNECTOR	1	KJ COMTECH	CN00034-7/1	MCX50-LP
1	COAXIAL CABLE		YE-EUN	ACA00039-N/1	YESF-085 (BLUE JACKET)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2010. 03. 03.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	Y.H.CHOI				
	CHECKED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angles : -1.0° ~ -3.0°	DRAWN BY	D.W.KANG		TITLE CABLE ASS'Y		
	CHECKED BY					
	SCALE 1/1	UNIT		A4		
				DWG NO.	CF00504-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1

CABLE LENGTH TOLERANCE
0 ~ 50mm : +0.5 ~ -0.5
50 ~ 200mm : +1.0 ~ -1.0
100 ~ 500mm : +2.0 ~ -2.0
200 ~ 500mm : +3.0 ~ -3.0
Bending Angles : -1.0° ~ -3.0°