


CF00515-7/3

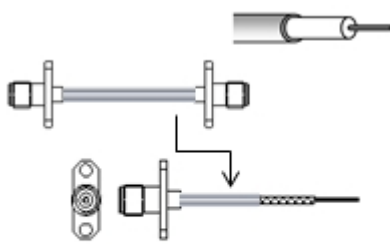

2.92mm(PTFE)-JS-2H+OPEN
+85TP
2.92mm(PTFE) JS-2H 85TP
BO/GO, PI/GO

CF00515-7/3 200mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

200mm
S11, S22, S21 (dB)

■ _2GHz	- 1.05, 1.01, 0.25
■ _4GHz	- 1.03, 1.02, 0.35
■ _6GHz	- 1.11, 1.11, 0.46
■ _8GHz	- 1.17, 1.16, 0.56
■ 10GHz	- 1.09, 1.11, 0.63
■ 12GHz	- 1.09, 1.08, 0.70
■ 14GHz	- 1.24, 1.23, 0.78
■ 16GHz	- 1.27, 1.25, 0.80
■ 18GHz	- 1.10, 1.09, 0.81

► NETWORK ANALYZER

- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

► Test cable

- 2.4mm Male to 2.4mm Male
50GHz Cable

► Test Adaptor

- 2.4mm (J) to 2.92mm (P)
AD00646-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

