



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	S.H.KIM	2011.03.17.

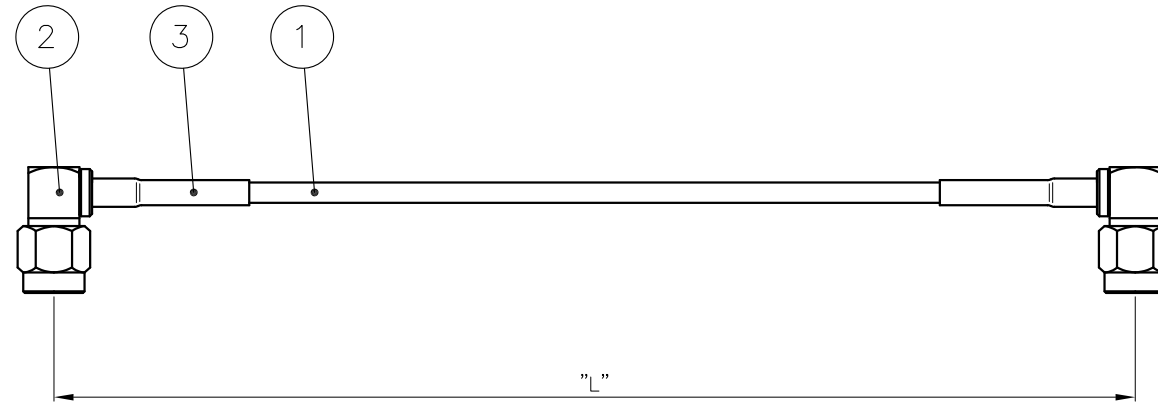

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. SMA50 PL----▶▶ BODY : Gold Plating
 - CONTACT : Gold Plating
 - COVER : Gold Plating
 - CAP : Nickel Plating

3	SHRINK TUBE	2	LS TUBE	ATU00358-N/1	GSHS-1635F-Ø4-BK Ø4-20 (Black)
2	CONNECTOR	2	KJ COMTECH	CN00123-7/2	SMA50 PL
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	EXRG-316S-50-CW RG316(50Ω) (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2011. 03. 17.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	S.H.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5 ~ -0 1000 ~ 2000mm : +10 ~ -0 2000 ~ 3000mm : +15 ~ -0 3000 ~ 4000mm : +20 ~ -0 4000 ~ 5000mm : +25 ~ -0 Bending Angles : -1.0° ~ -3.0°	DRAWN BY	E.H.KIM		A4		
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				DWG NO.	CF00536-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +5 ~ -0
 1000 ~ 2000mm : +10 ~ -0
 2000 ~ 3000mm : +15 ~ -0
 3000 ~ 4000mm : +20 ~ -0
 4000 ~ 5000mm : +25 ~ -0
 Bending Angles : -1.0° ~ -3.0°