
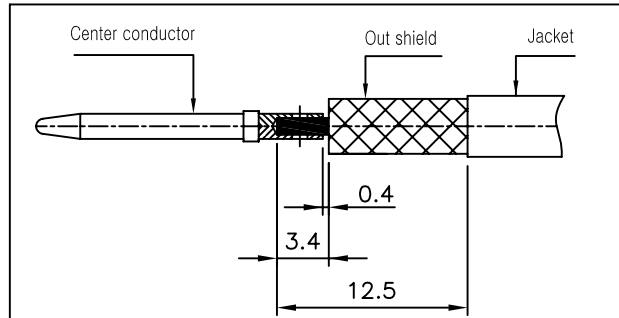



ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. VSWR (Max) : 1.2@DC~10GHz


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.05.22.

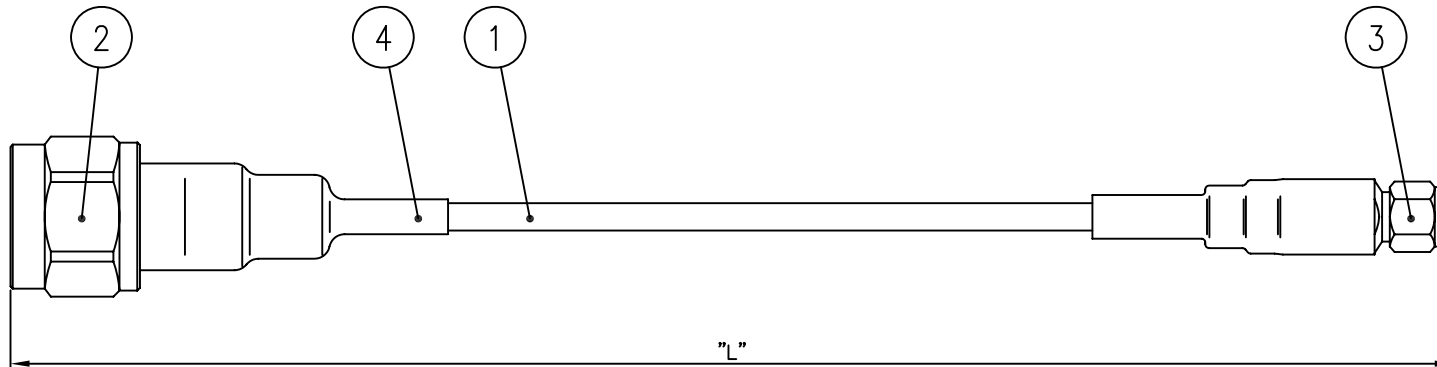

2번 CONNECTOR 탈피도

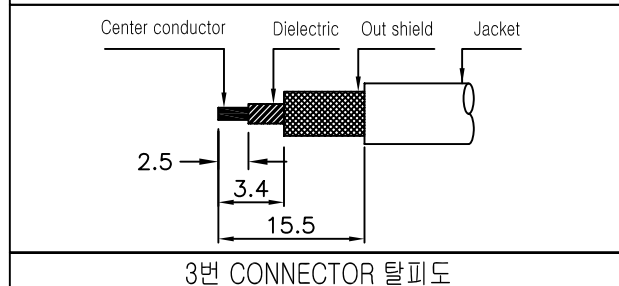

3번 CONNECTOR 탈피도

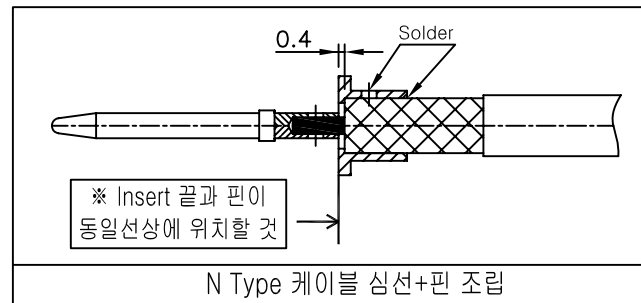

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N PS-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-1. SMA PS-----▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

4	BONDING TUBE	2	LS TUBE	ATU00012-N/1	Ø12-60mm-BLACK
3	CONNECTOR	1	KJ COMTECH	CN02764-7/8	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN01262-7/4	N50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00040-N/1	141FJ(50Ω)-BLUE
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE 2019. 05. 22.

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%

APPROVED BY	I.C.KIM
CHECKED BY	
DRAWN BY	S.Y.EUN
CHECKED BY	
SCALE	N/S
UNIT	mm



TITLE		CABLE ASS'Y	
DWG NO.	CF00548-7/3	REVISION	I R
DETAIL NO.		SHEET	1 of 1