


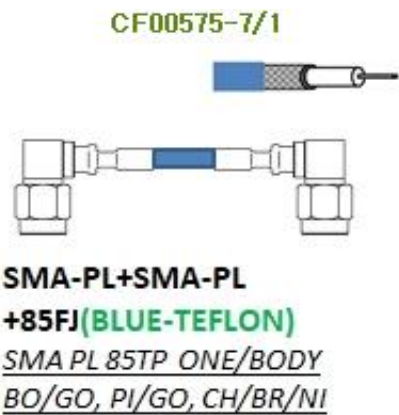

CF00575-7/1 150mm	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

150mm - S11/S22/S21 (SWR, SWR, dB)	
☒ _1.0GHz	- 1.07, 1.08, 0.17
☒ _2.0GHz	- 1.03, 1.05, 0.25
☒ _3.0GHz	- 1.18, 1.18, 0.36

☒ _4.0GHz	- 1.08, 1.07, 0.39
☒ _5.0GHz	- 1.28, 1.28, 0.52
☒ _6.0GHz	- 1.25, 1.24, 0.58
☒ _7.0GHz	- 1.17, 1.16, 0.58
☒ _8.0GHz	- 1.54, 1.52, 0.81

- ▶ NETWORK ANALYZER

☒ E5071B (~8.5GHz)

☐ ZVA50 (~50GHz)
- ▶ Test cable

☒ N Male to SMA Male

10GHz Cable (CF00540-7/1)
- ▶ Test Adaptor

☒ SMA (J) SMA (J) ST

AD00006-7/2

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

