


CF00575-7/2

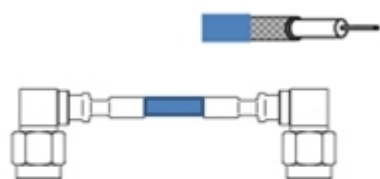

SMA-PL+SMA-PL
+85FJ(BLUE-PVC) **ONE/BODY**
BO/GO, PI/GO, CH/BR/NI

CF00575-7/2 150mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

**150mm - S11/S22/S21
(SWR, SWR, dB)**

■_1.0GHz	- 1.07, 1.08, 0.17
■_2.0GHz	- 1.03, 1.05, 0.25
■_3.0GHz	- 1.18, 1.18, 0.36

■_4.0GHz	- 1.08, 1.07, 0.39
■_5.0GHz	- 1.28, 1.28, 0.52
■_6.0GHz	- 1.25, 1.24, 0.58
■_7.0GHz	- 1.17, 1.16, 0.58
■_8.0GHz	- 1.54, 1.52, 0.81

► **NETWORK ANALYZER**

► **Test cable**

► **Test Adaptor**

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

AD00006-7/2

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

