


CF00607-7/1

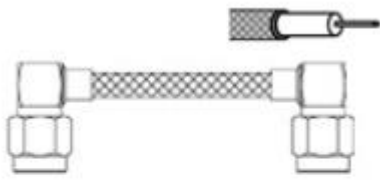

SMA-PL+SMA-PL

+141F

SMA PL 141

BO/NI, PI/GO, CH/BR/NI

13.5GHz, VSWR 1.2:1

CF00607-7/1 100mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

100mm - S11/S22/S21 (SWR, SWR, dB) 구형 CN측 정..

■ 1.0GHz	- 1.02, 1.00, 0.10
■ 2.0GHz	- 1.02, 1.02, 0.17
■ 3.0GHz	- 1.08, 1.07, 0.23
■ 4.0GHz	- 1.11, 1.10, 0.27
■ 5.0GHz	- 1.13, 1.12, 0.29

■ 6.0GHz	- 1.21, 1.19, 0.35
■ 7.0GHz	- 1.31, 1.30, 0.45
■ 8.0GHz	- 1.40, 1.41, 0.47

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)


AD00006-7/2

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

CF00607


Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

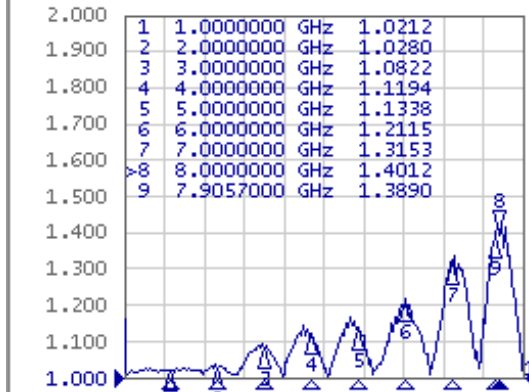

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

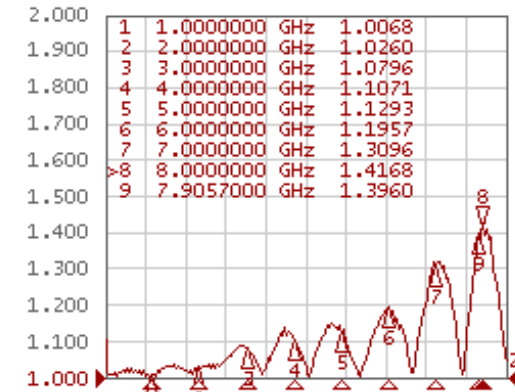

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]

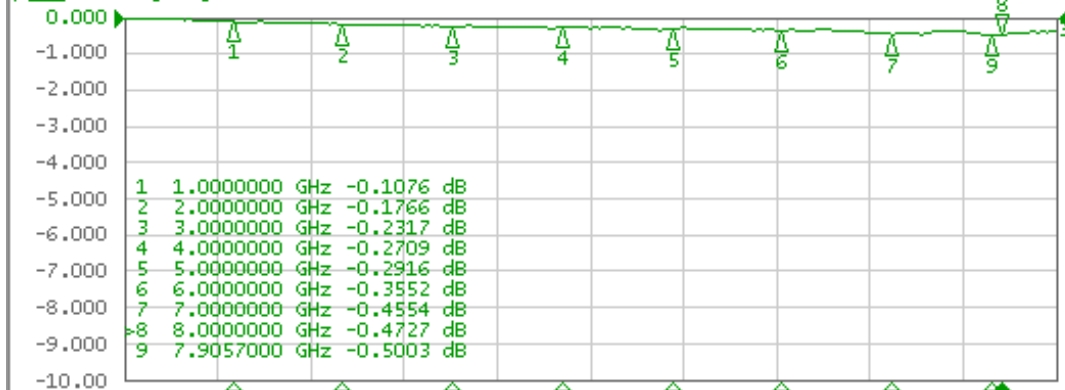

1 Start 10 MHz

IFBW 70 kHz

Stop 8.5 GHz

Cor 1988-01-01 03:17

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multiport Test Set Setup

Misc Setup

Backlight

ON

Firmware

Revision