


REVISION


REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.10.29.

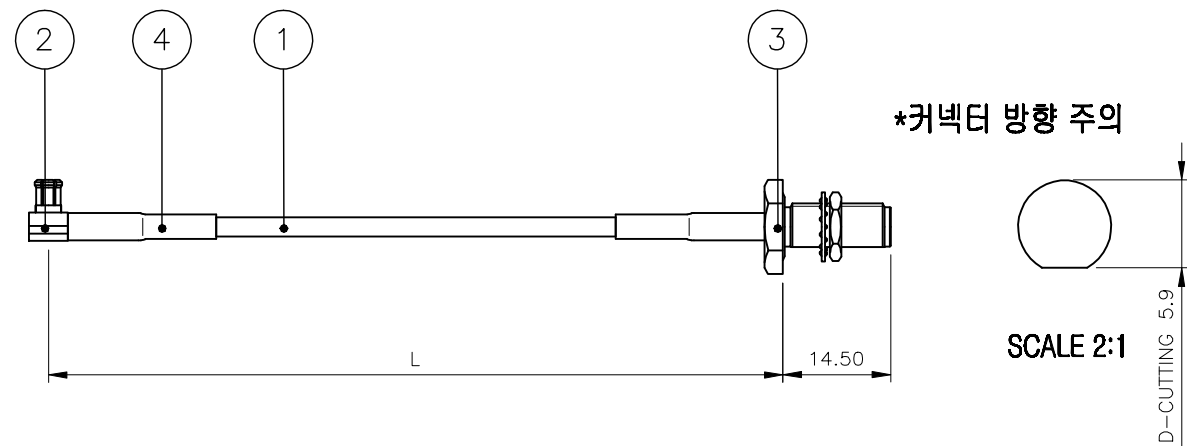


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. MCX PL-----▶ BODY : Gold Plating
CONTACT : Gold Plating
JACK : Gold Plating
 - 2-2. SMA JB-----▶ BODY : Gold Plating
CONTACT : Gold Plating

4	SHRINK TUBE	2	SUMITOMO	ATU00056-N/1	ø4 - BLACK
3	CONNECTOR	1	KJ COMTECH	CN01051-7/1	SMA50 JB
2	CONNECTOR	1	KJ COMTECH	CN00714-7/1	MCX50 PL
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316 (BROWN)

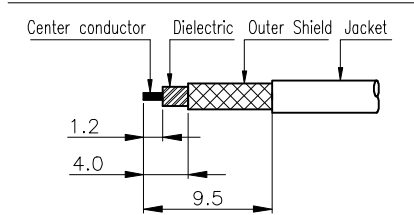

②번 Connector 탈피도

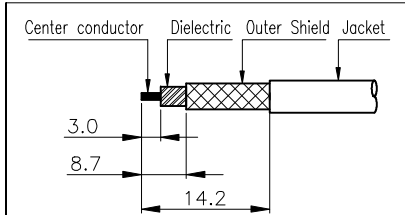

③번 Connector 탈피도

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 10. 29.			 RF & MICROWAVE TECHNOLOGY Tel : 82-82-947-8015 Fax : 82-82-947-8017 KJ CONTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			A4		
	DRAWN BY	S.Y.EUN				
	CHECKED BY			DWG NO. CF00608-7/2		
	SCALE	UNIT				
	N/S	mm				
				REVISION	I R	SHEET 1 of 1

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%

A4