

CF00676-7/2

**SMA-PS+SMA-PS****+SIFS(BLUE)**SMA PS SIFSBO/GO, PI/GO, CH/BR/NI**CF00676-7/2 500mm**

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

■_0.5GHz	- 1.01, 1.01, 0.27
■_1.0GHz	- 1.02, 1.01, 0.41
■_1.5GHz	- 1.02, 1.02, 0.54
■_2.0GHz	- 1.01, 1.01, 0.64
■_3.0GHz	- 1.04, 1.04, 0.82
■_4.0GHz	- 1.00, 1.01, 0.98
■_5.0GHz	- 1.09, 1.09, 1.14
■_6.0GHz	- 1.16, 1.15, 1.24

► NETWORK ANALYZER

► Test cable

► Test Adaptor

☐ E5071B (~8.5GHz)☒ ZND (~8.5GHz)☐ ZVA50 (~50GHz)☐ N Male to SMA Male


10GHz Cable (CF00540-7/1)

☒ N Male to N Male

10GHz Cable (CF00539-7/1)

☐ 2.4mm Male to 2.4mm Male

50GHz Cable

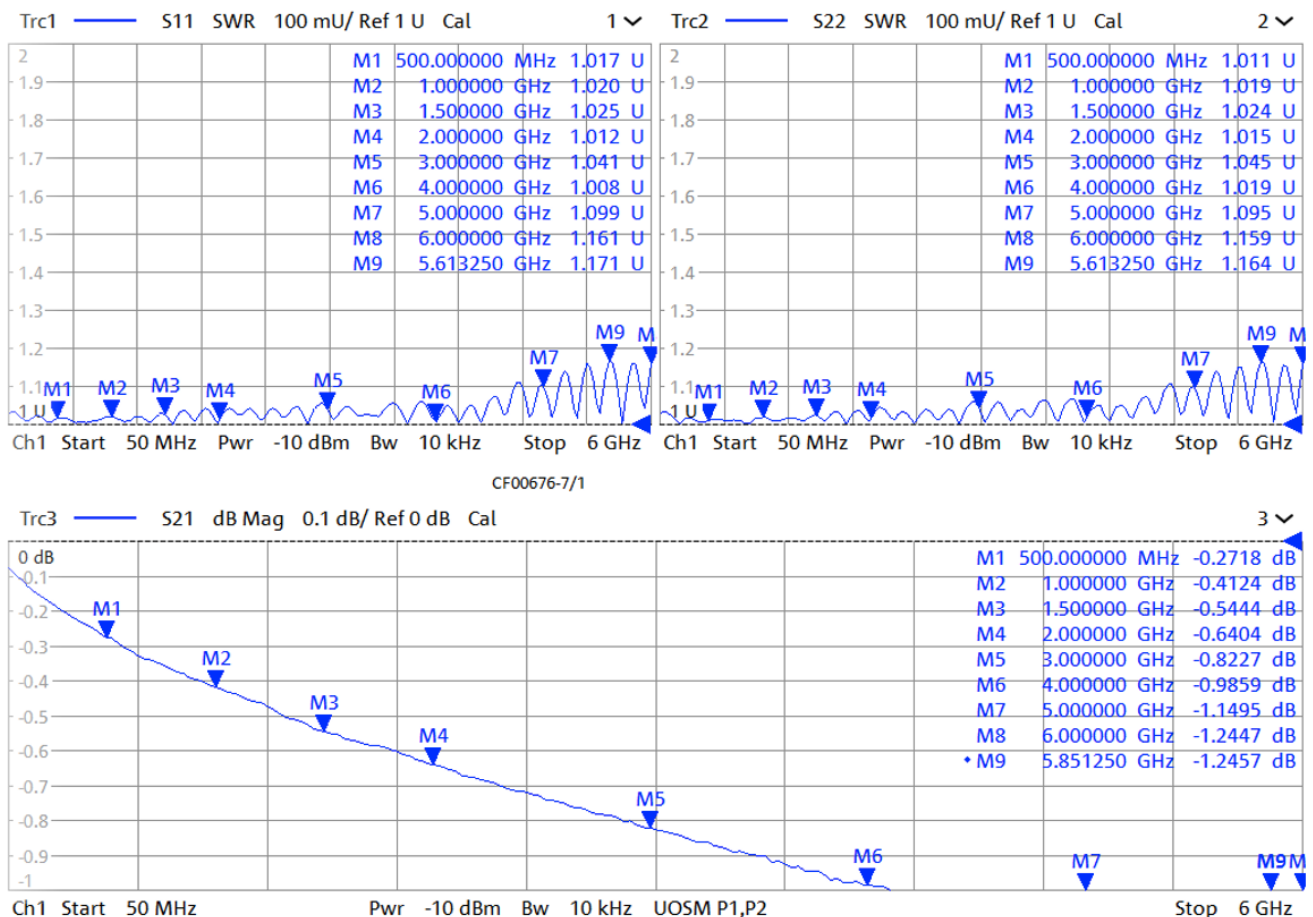

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)