


조립 주의사항


1. CN01964-7/1 핀의 스프링 동작여부를 한번 더 전수검사하여 문제 없으면 투입 조립 진행

SWD 커넥터 측정 아답터 코드 : AD00384-7/1



ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : ~6GHz
3. VSWR (Max) :
4. INSERTION LOSS (Max) :

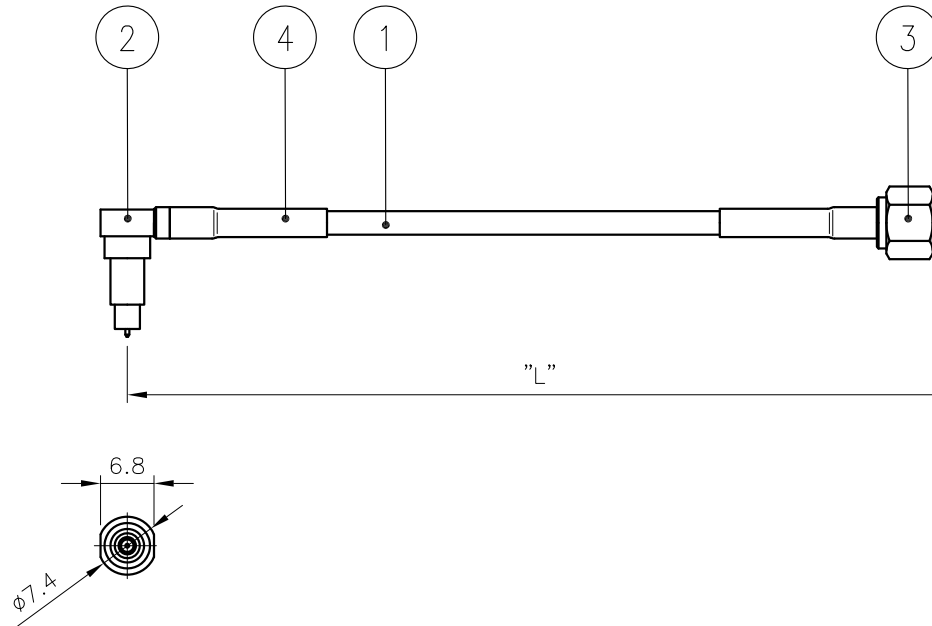

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SWD PL----▶▶BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. SMA PS----▶▶BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2013.10.02.

4	SHRINK TUBE	2	SUMITOMO	ATU00056-N/1	Ø4-20 BLACK
3	CONNECTOR	1	KJ COMTECH	CN00901-7/1	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN01964-7/1	SWD50 PL
1	COAXIAL CABLE		FUJIKURA	ACA00210-N/1	EM-1.5D-HQEW (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2013. 10. 02.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM					TITLE CABLE ASSY
	CHECKED BY	E.H.KIM					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	I.C.KIM		A4 DWG NO. CF00703-7/1 DETAIL NO. REVISION R SHEET 1 of 1			
	CHECKED BY						
	SCALE	UNIT					
	N/S	mm					