


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2015.05.07.
1	[출판No.201506-0002] 전기적 SPEC 영기	H.J.LEE	I.C.KIM	2015.05.07.

SMA

MMCX

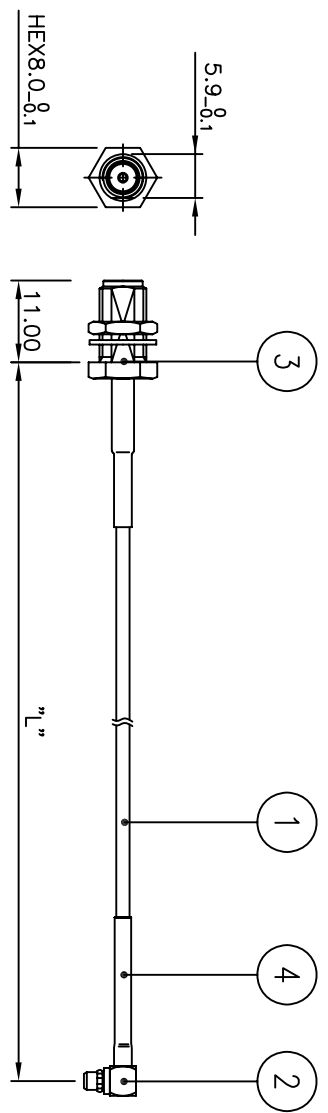


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES

2-1. MMCX PL -----▶ BODY : Gold Plated
CONTACT : Gold Plated

2-2. SMA50 JB -----▶ BODY : Gold Plated
CONTACT : Gold Plated

- * Electronical Spec
1. Impedance : 50Ω nominal
 2. Frequency Range : DC ~6GHz
 3. V.S.W.R. : 1.6 : 1 (Max)

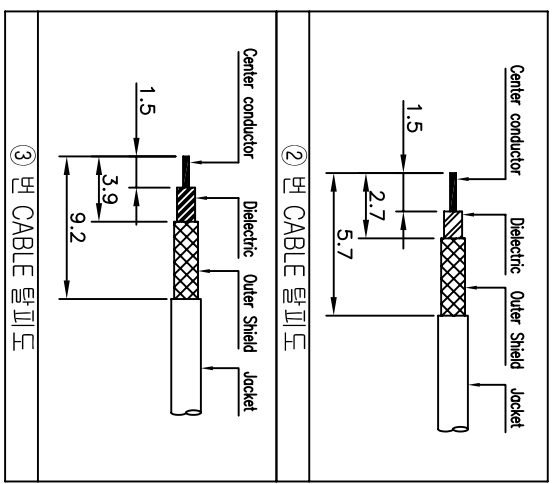

CONTACT : Gold Plated								
▷ BODY : Gold Plated								
CONTACT : Gold Plated								
CUSTOMER	4	SHRING TUBE	2	LS TUBE	ATU000056-N/1	Ø4-BLACK		
	3	CONNECTOR	1	KJ COMTECH	CN001104-7/12	SMA50 JB		
	2	CONNECTOR	1	KJ COMTECH	CN000110-7/1	MMCX350 PL		
	1	COAXIAL CABLE		EXPANTEL	ACA00046-N/1	Rg178(60s)		
	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS		
DATE	2015. 06. 01.							
CUSTOMER CODE	APPROVED BY	I.C.KIM	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017					
CABLE LENGTH TOLERANCE	CHECKED BY	S.M.LEE						
0 ~ 1000mm : +5, -0	DRAWN BY	H.J.LEE						
1000 ~ 2000mm : +10, -0	CHECKED BY							
2000 ~ 3000mm : +15, -0	SCALE	UNIT	A4					
3000 ~ 4000mm : +20, -0	N/S	mm				REVISION	1	SHEET
4000 ~ 5000mm : +25, -0						1	1 of 1	
5000 ~								