


Technical drawing of a shaft assembly. The shaft is labeled with dimensions and specific points:

- 2**: Dimension from the left end to the center of the first keyway.
- 4**: Dimension from the center of the first keyway to the center of the second keyway.
- 5**: Dimension from the center of the second keyway to the center of the third keyway.
- 1**: Dimension from the center of the third keyway to the right end of the shaft.
- 3**: Dimension from the right end of the shaft to the center of the fourth keyway.
- MARKING A**: Located at the center of the first keyway.
- MARKING B**: Located at the center of the second keyway.
- MARKING C**: Located at the center of the third keyway.
- "L"**: Total length of the shaft.

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PS---▶▷BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. TCN PS---▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

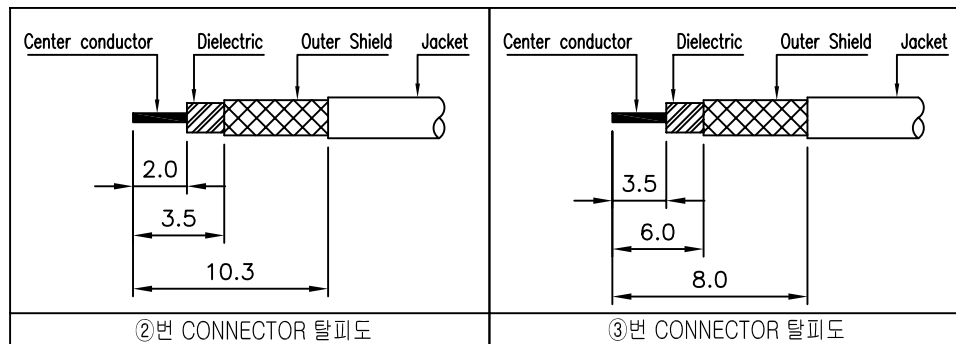

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.		RAMARKS		
	DATE2018. 07. 17.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.					
CUSTOMER CODE	APPROVED BY	I.C.KIM							
	CHECKED BY			TITLECABLE ASS'Y					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN							
	CHECKED BY								
	SCALE	UNIT			A4	DWG NO.	CF00726-7/2		
	N/S	mm				DETAIL NO.			
					REVISION	I R	SHEET	1 of 1	