
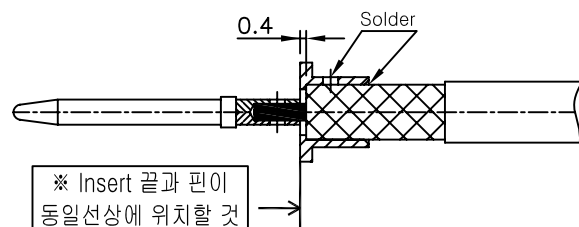


ELECTRICAL DATA


1. IMPEDANCE : 50ohm
2. VSWR (Max) : 1.2@DC~10GHz

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.03.02.

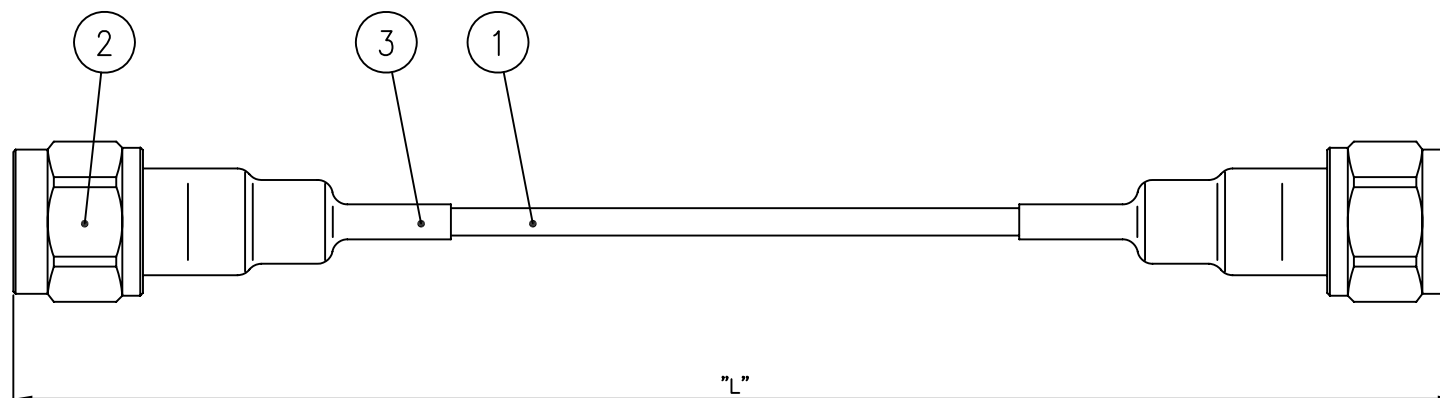

N Type 케이블 심선+핀 조립

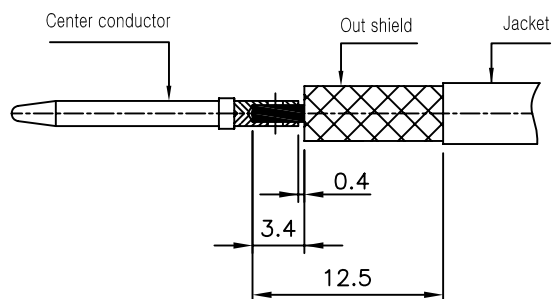

2번 CONNECTOR 탈피도

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N PS-----▶▶ BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

3	BONDING TUBE	2	LS TUBE	ATU00012-N/1	Ø12-60mm-BLACK
2	CONNECTOR	2	KJ COMTECH	CN01262-7/4	N50 PS
1	COAXIAL CABLE		SUHNER	ACA00090-N/1	SUCOFORM141(500) (BROWN)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE 2020. 03. 02.

CUSTOMER

CUSTOMER CODE

CABLE LENGTH TOLERANCE

0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%

APPROVED BY I.C.KIM


CHECKED BY

DRAWN BY S.Y.EUN

CHECKED BY

SCALE N/S

UNIT mm



RF & MICROWAVE
 TECHNOLOGY
 Tel : 82-32-347-8015
 Fax : 82-32-347-8017

TITLE

CABLE ASS'Y

DWG NO.

CF00755-7/4

DETAIL NO.

REVISION

I R

SHEET

1 of 1